

# ESW-129-23-S-S-LL

#### ESW-129-23-S-S-LL Information

	Dont Number	ESW-129-23-S-S-LL	
Heisener.com Statience sate her	Manufacturer		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description Package	ELEVATED SOCKET STRIPS -	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## ESW-129-23-S-S-LL Specifications

Manufacturer Part NumberESW-129-23-S-S-LLManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Rows1Number of Rows0.100" (2.54mm)Number of Rows1Row Spacing - MatingSided Pin SolderNumber of Rows1Row Spacing - MatingKinked Pin, SolderForniationKinked Pin, SolderForter Finish - MatingGoldContact Finish - MatingSigni (0.76µm)Insulation ColorBiakInsulation ColorBiak		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions Loaded1Pitch - Mating0.100° (2.54mm)Number of Rows1Number of Rows1Row Spacing - MatingSinked Pin, SolderMounting TypeKinked Pin, SolderFreminationGoldFortact Finish - MatingGoldContact Finish - MatingSolin (0.76µm)Insulation ColorBiack	Manufacturer Part Number	ESW-129-23-S-S-LL
IdentifyRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating100° (2.54mm)Number of Rows1Row Spacing - Mating5Noning TypeSinked Pin SolderPreminationPine HealtRow Spacing - MatingInone (1.54mm)PreminationSinked Pin SolderFarminationGinked Pin SolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingSinked Pin SolderInsulation ColorBack	Manufacturer	Samtec Inc.
Package.SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Yough HoleKinked Pin, SolderFarminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish Finkeness - MatingBiack	Category	Connectors, Interconnects
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingSupin (0.76µm)Insulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFareninationKinked Pin, SolderFastening TypeGoldContact Finish - MatingGoldInsultation ColorBiakk	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOddContact Finish - MatingGoldInsulation ColorBlack	Series	ESW
StyleBoard to BoardNumber of Positions29Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOldContact Finish - MatingGoldIonator Finish - MatingBlack	Connector Type	Elevated Socket
Number of Positions29Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlack	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlack	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingBlack	Number of Positions	29
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlack	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Number of Rows	1
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Termination	Kinked Pin, Solder
Contact Finish Thickness - Mating30μin (0.76μm)Insulation ColorBlack	Fastening Type	Push-Pull
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	30µin (0.76µm)
Insulation Height 0.535" (13.60mm)	Insulation Color	Black
	Insulation Height	0.535" (13.60mm)
Contact Length - Post 0.190" (4.83mm)	Contact Length - Post	0.190" (4.83mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

### ESW-129-23-S-S-LL Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# ESW-129-23-S-S-LL Payment Methods

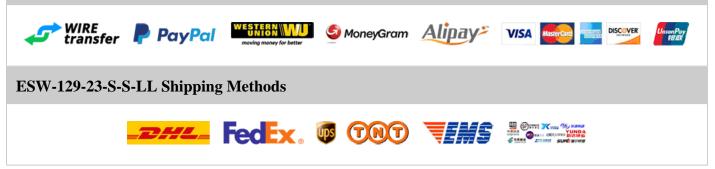

If you have any question about ESW-129-23-S-S-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com