

ESW-136-38-G-S-LL

ESW-136-38-G-S-LL Information

Heisener.com		ESW-136-38-G-S-LL	
	Manufacturer	Samtec Inc.	TELL #Provide
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	ELEVATED SOCKET STRIPS	
	Package	-	- 同談登場
For Reference Only		For the pricing/inventory/lead time, please contact	
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quot

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ESW-136-38-G-S-LL Specifications

Manufacturer Part NumberESW-136-38-G-S-LLManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingForkey HoleNounting TypeForkey HoleForminationKinked Pin, SolderForminationGoldFortact Finish - MatingGoldContact Finish Thickness - MatingGold			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedIPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSidee Pin SolderMounting TypeFinked Pin SolderFastening TypeOuth CollFontact Finish - MatingGoldContact Finish - MatingGold	Manufacturer Part Number	ESW-136-38-G-S-LL	
IdentifyRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - MatingSinked Pin SolderMounting TypeMinden Gin SolderFastening TypePush-PulContact Finish - MatingGoldContact Finish Thickness - MatingSinke 0.51µm)	Manufacturer	Samtec Inc.	
Package-SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)	Category	Connectors, Interconnects	
SeriesESWConnector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypeQuah Push-PullFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeElevated SocketContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypeOuh PullContact Finish - MatingGoldContact Finish Thickness - Mating2ujin (0.51µm)	Package	-	
Contact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish Thickness - Mating20µin (0.51µm)	Series	ESW	
StyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish - Mating20µin (0.51µm)	Connector Type	Elevated Socket	
Number of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldYoung Contact Finish Thickness - Mating20µin (0.51µm)	Contact Type	Forked	
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)	Style	Board to Board	
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldYontact Finish Thickness - Mating2µµn (0.51µm)	Number of Positions	36	
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)	Number of Positions Loaded	A11	
Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)	Number of Rows	1	
TerminationKinked Pin, SolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20μin (0.51μm)	Row Spacing - Mating	-	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20μin (0.51μm)	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating20μin (0.51μm)	Termination	Kinked Pin, Solder	
Contact Finish Thickness - Mating 20µin (0.51µm)	Fastening Type	Push-Pull	
	Contact Finish - Mating	Gold	
	Contact Finish Thickness - Mating	20µin (0.51µm)	
Insulation Color Black	Insulation Color	Black	
Insulation Height 0.435" (11.05mm)	Insulation Height	0.435" (11.05mm)	
Contact Length - Post 0.290" (7.37mm)	Contact Length - Post	0.290" (7.37mm)	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

ESW-136-38-G-S-LL Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ESW-136-38-G-S-LL Payment Methods

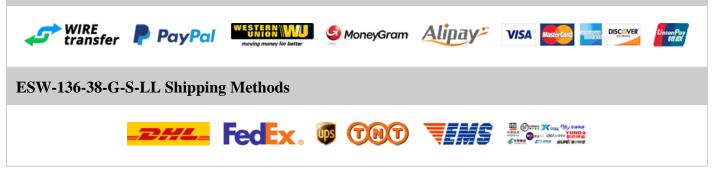

If you have any question about ESW-136-38-G-S-LL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com