


ETS090220UTC-P5P-SZ

ETS090220UTC-P5P-SZ Information

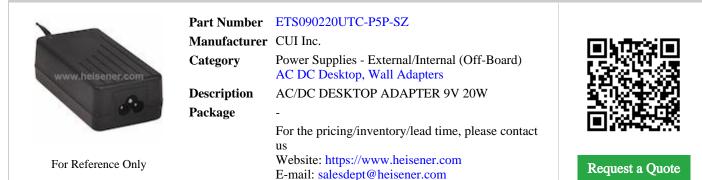

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

ETS090220UTC-P5P-SZ Specifications

Manufacturer Part Number ETS090220UTC-P5P-SZ Manufacturer CUI Inc. Category Power Supplies - External/Internal (Off-Board) Ac DC Desktop, Wall Adapters AC DC Desktop, Wall Adapters Package - Series ETS 20W Region Utilized North America Porm Desktop (Class I) Input Type Cord Voltage - Input 90 ~ 255 VAC Voltage - Output (Max) 92 Power (Watts) 20W Not Load Power Consumption SolomW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Barrel Plug, 2.1mm I.D.x 5.5mm O.D.x 9.5mm Size / Dimension Solom Y x 1.25" H (99.0mm x 51.0mm x 31.7mm)		
Category Power Supplies - External/Internal (Off-Board) AC DC Desktop, Wall Adapters Package - Series ETS 20W Region Utilized North America Form Desktop (Class I) Input Type Cord Voltage - Input 90 ~ 255 VAC Voltage - Output (Max) 90 ~ 255 VAC Current - Output (Max) 2.2A Power (Watts) 20W No Load Power Consumption 500mW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Bartel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.00" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Manufacturer Part Number	ETS090220UTC-P5P-SZ
AC DC Debktop, Wall AdaptersPackage-SeriesETS 20WRegion UtilizedNorth AmericaFormDesktop (Class I)Input TypeCordVoltage - Input90 ~ 255 VACVoltage - Output90 ~ 255 VACCurrent - Output (Max)2.2APower (Watts)00W(Max)No Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)Efficiency0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Manufacturer	CUI Inc.
Package-SeriesETS 20WRegion UtilizedNorth AmericaFormDesktop (Class I)Input TypeCordVoltage - Input90 ~ 255 VACVoltage - Output9VCurrent - Output (Max)2.2APower (Watts)500mW (Max)No Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)Efficiency0°C ~ 40°COutput ConnectorBartel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dinnension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Category	Power Supplies - External/Internal (Off-Board)
Series ETS 20W Region Utilized North America Form Desktop (Class I) Input Type Cord Voltage - Input 90 ~ 255 VAC Voltage - Output 9V Current - Output (Max) 2.2A Power (Watts) 20W Notad Power Consumption 500mW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Barrel Plug, 2.1mm I.D.x 5.5mm O.D.x 9.5mm Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)		AC DC Desktop, Wall Adapters
Region Utilized North America Form Desktop (Class I) Input Type Cord Voltage - Input 90 ~ 255 VAC Voltage - Output 9V Current - Output (Max) 2.2A Power (Watts) 20W No Load Power Consumption 500mW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Barrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Package	-
Form Desktop (Class I) Input Type Cord Voltage - Input 90 ~ 255 VAC Voltage - Output 9V Current - Output (Max) 9V Power (Watts) 2.2A Power (Watts) 500mW (Max) Polarization 500mW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Barrel Plug, 2.1mm I.D.x 5.5mm O.D.x 9.5mm Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 51.7mm)	Series	ETS 20W
Input TypeCordVoltage - Input90 ~ 255 VACVoltage - Output9VCurrent - Output (Max)2.2APower (Watts)20WNo Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)Efficiency0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D.x 5.5mm O.D.x 9.5mmSize / Dimension3.00" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Region Utilized	North America
IntroductionIntroductionVoltage - Input90 ~ 255 VACVoltage - Output9VCurrent - Output (Max)2.2APower (Watts)20WNo Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Form	Desktop (Class I)
Voltage - Output 9V Current - Output (Max) 2.2A Power (Watts) 20W No Load Power Consumption 500mW (Max) Polarization Positive Center Applications ITE (Commercial) Efficiency Level V Operating Temperature 0°C ~ 40°C Output Connector Barrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Input Type	Cord
Current - Output (Max)2.2APower (Watts)20WNo Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Voltage - Input	90 ~ 255 VAC
Power (Watts)20WNo Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Voltage - Output	9V
No Load Power Consumption500mW (Max)PolarizationPositive CenterApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Current - Output (Max)	2.2A
PolarizationPositive CenterApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	Power (Watts)	20W
ApplicationsITE (Commercial)EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 31.7mm)	No Load Power Consumption	500mW (Max)
EfficiencyLevel VOperating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Polarization	Positive Center
Operating Temperature0°C ~ 40°COutput ConnectorBarrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mmSize / Dimension3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Applications	ITE (Commercial)
Output Connector Barrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mm Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Efficiency	Level V
Size / Dimension 3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)	Operating Temperature	0° C ~ 40° C
	Output Connector	Barrel Plug, 2.1mm I.D. x 5.5mm O.D. x 9.5mm
Report errors?	Size / Dimension	3.90" L x 2.01" W x 1.25" H (99.0mm x 51.0mm x 31.7mm)
		Report errors?

ETS090220UTC-P5P-SZ Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ETS090220UTC-P5P-SZ Payment Methods





If you have any question about ETS090220UTC-P5P-SZ, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com