


EWT50JB5K00

EWT50JB5K00 Information



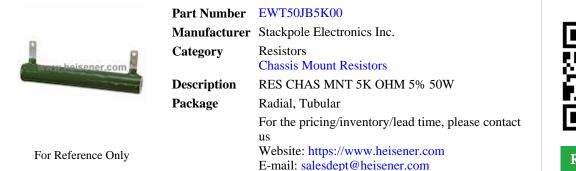

Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



EWT50JB5K00 Specifications

ManufacturerStackpole Electronics Inc.CategoryResistorsChassis Mount ResistorsPackageRadial, TubularSeriesEWTResistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTomperature Coefficient-Operating TemperatureFlame Proof, SafetyCoating, Housing TypeSick (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Bight - Seated (Max)-Package / CaseFaduresPackage / CaseTabPackage / CaseKadia, Tubular		
CategoryResistorsPackageRadial, TubularPackageRadial, TubularSeriesEWTResistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTomperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyKounting FeatureBrackets (not included)Size / Dimension0.563° Dia x 4.016° L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabFailure Rate.Failure Rate.Ster Ster Ster Ster Ster Ster Ster Ster	Manufacturer Part Number	EWT50JB5K00
Chassis Mount ResistorsPackageRadial, TubularSeriesEWTResistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting Feature0.563" Dia x 4.016" L (14.30mm x 102.00mm)Size / Dimension-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Manufacturer	Stackpole Electronics Inc.
PackageRadial, TubularSeriesEWTResistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing Type9kackts (not included)Mounting Feature0.563° Dia x 4.016° L (14.30mm x 102.00mm)Size / Dimension-Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Category	Resistors
SeriesEWTResistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting Feature0.563" Dia x 4.016" L (14.30mm x 102.00mm)Size / Dimension-Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-		Chassis Mount Resistors
Resistance5 kOhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeBrackets (not included)Mounting Feature0.563" Dia x 4.016" L (14.30mm x 102.00mm)Size / Dimension-Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Package	Radial, Tubular
Tolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Series	EWT
Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Resistance	5 kOhms
CompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Tolerance	±5%
Temperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Power (Watts)	50W
Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Composition	Wirewound
FeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Temperature Coefficient	-
Coating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Operating Temperature	-55°C ~ 350°C
Mounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Features	Flame Proof, Safety
Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Coating, Housing Type	Vitreous Enamel Coated
Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Mounting Feature	Brackets (not included)
Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Size / Dimension	0.563" Dia x 4.016" L (14.30mm x 102.00mm)
Package / Case Radial, Tubular Failure Rate -	Height - Seated (Max)	-
Failure Rate -	Lead Style	Tab
	Package / Case	Radial, Tubular
Report errors?	Failure Rate	-
		Report errors?

EWT50JB5K00 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

EWT50JB5K00 Payment Methods





If you have any question about EWT50JB5K00, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com