


# EWT50JB750R

### **EWT50JB750R Information**



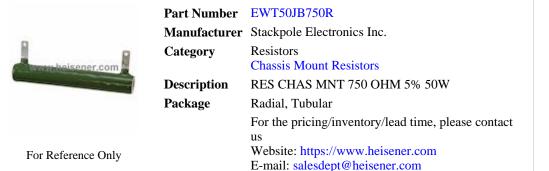

**Request a Quote** 

For Reference Only

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **EWT50JB750R Specifications**

Tolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, Safety		
Category Resistors   Chassis Mount Resistors   Package Radial, Tubular   Series EWT   Resistance 750 Ohms   Tolerance ±5%   Power (Watts) 50W   Composition Wirewound   Tolerance Coefficient -   Operating Temperature 55°C ~ 350°C   Features Flame Proof, Safety   Odotting, Housing Type Vitreous Enamel Coated   Mounting Feature 563° Dia x 4.016" L (14.30mm x 102.00mm)   Size / Dimension -   Lead Style Tab   Package / Case Radial, Tubular   Faiture Rate Stait Tubular	Manufacturer Part Number	EWT50JB750R
Chassis Mount ResistorsPackageRadial, TubularSeriesEWTResistance750 OhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting Feature56°C not included)Size / Dimension0.563° Dia x 4.016° L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Manufacturer	Stackpole Electronics Inc.
PackageRadial, TubularSeriesEWTResistance750 OhmsTolerance55%Power (Watts)50WCompositionWirewoundTomperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeSick (not included)Nounting Feature-Size / Dimension-Height - Seated (Max)-Lead StyleTabPackage / CaseRadia, TubularFalure Rate-Falure Rate <td< td=""><td>Category</td><td>Resistors</td></td<>	Category	Resistors
SeriesEWTResistance750 OhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeBrackets (not included)Nounting Feature0.563° Dia x 4.016° L (14.30mm x 102.00mm)Size / Dimension-Height - Seated (Max)-Lead StyleTabPackage / CaseRacial, TubularFailure Rate-		Chassis Mount Resistors
Resistance750 OhmsTolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeBrackets (not included)Nounting Feature0.563" Dia x 4.016" L (14.30mm x 102.00mm)Size / Dimension-Height - Seated (Max)-Package / CaseRadia, TubularFailure Rate-For Stafe Conserver-Failure Rate-For Stafe Conserver-For Stafe Conserver-Fackage / Case-Failure Rate-Failure Rate-Fail	Package	Radial, Tubular
Tolerance±5%Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVireous Enamel CoatedMounting FeatureBackets (not included)Size / Dimension.563° Dia x 4.016° L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-Starter Starter-Starter StarterSafetarterStarter Starter-Starter Starter-Starter Starter-Starter Starter Starter-Starter Starter Starter-Starter Starter Starter-Starter Starter Starter Starter-Starter Starter Starter Starter Starter Starter-Starter Starter Start	Series	EWT
Power (Watts)50WCompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVireous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Resistance	750 Ohms
CompositionWirewoundTemperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Tolerance	±5%
Temperature Coefficient-Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Power (Watts)	50W
Operating Temperature-55°C ~ 350°CFeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Composition	Wirewound
FeaturesFlame Proof, SafetyCoating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Temperature Coefficient	-
Coating, Housing TypeVitreous Enamel CoatedMounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Operating Temperature	-55°C ~ 350°C
Mounting FeatureBrackets (not included)Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Features	Flame Proof, Safety
Size / Dimension0.563" Dia x 4.016" L (14.30mm x 102.00mm)Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Coating, Housing Type	Vitreous Enamel Coated
Height - Seated (Max)-Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Mounting Feature	Brackets (not included)
Lead StyleTabPackage / CaseRadial, TubularFailure Rate-	Size / Dimension	0.563" Dia x 4.016" L (14.30mm x 102.00mm)
Package / CaseRadial, TubularFailure Rate-	Height - Seated (Max)	-
Failure Rate -	Lead Style	Tab
	Package / Case	Radial, Tubular
Report errors?	Failure Rate	-
		Report errors?

#### **EWT50JB750R Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### **EWT50JB750R Payment Methods**





If you have any question about EWT50JB750R, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com