


EXB-F10V562G

EXB-F10V562G Information

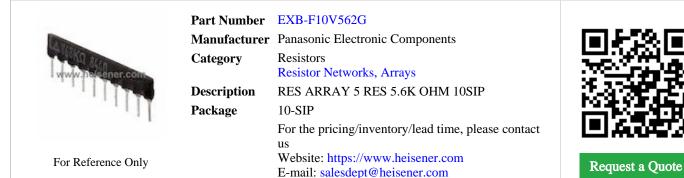

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



EXB-F10V562G Specifications

Resistor Networks, ArraysPackage10-SIPSeriesEXBCircuit TypeIsolatedResistance (Ohms)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWOperating Temperature-5°C ~ 125°COperating TypeThrough HoleApplications-Package / Case10-SIPSupplier Device Package0.5% L x 0.100" W (25.04mm x 2.54mm)		
CategoryResistorsResistor Networks, ArraysPackage10-SIPSeriesEXBCircuit TypeIsolatedResistance (Ohms)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWOperating Temperature-55°C ~ 125°COperating TypeThrough HoleApplications-Nunning Type10-SIPSupplier Device Package0.986° L x 0.100° W (25.04mm x 2.54mm)Height - Seated (Max)0.195° (4.95mm)	Manufacturer Part Number	EXB-F10V562G
Resistor Networks, ArraysPackage10-SIPSeriesEXBCircuit TypeIsolatedResistance (Ohms)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 125°CApplications-Nouning TypeThrough HolePackage / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986° L x 0.100° W (25.04mm x 2.54mm)Height - Seated (Max)0.195° (4.95mm)	Manufacturer	Panasonic Electronic Components
Package10-SIPSeriesEXBCircuit TypeIsolatedResistance (Ohns)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWOperating Temperature Coefficient±200pm/°COperating Temperature-55°C ~ 125°CApplications-Package / Case10-SIPSupplier Device Package10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Category	Resistors
SeriesEXBCircuit TypeIsolatedResistance (Ohms)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWTemperature Coefficient±200ppm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)		Resistor Networks, Arrays
Circuit TypeIsolatedResistance (Ohms)5.6kTolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature.55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.15" (4.95mm)	Package	10-SIP
Resistance (Ohms) 5.6k Tolerance ±2% Number of Resistors 5 Number of Resistors 10 Power Per Element 200mW Temperature Coefficient ±200ppm/°C Operating Temperature -55°C ~ 125°C Applications - Mounting Type Through Hole Package / Case 10-SIP Supplier Device Package 0.986" L x 0.100" W (25.04mm x 2.54mm) Height - Seated (Max) 0.195" (4.95mm)	Series	EXB
Tolerance±2%Number of Resistors5Number of Pins10Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Circuit Type	Isolated
Number of Resistors5Number of Pins10Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature-5°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Resistance (Ohms)	5.6k
Number of Pins10Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Tolerance	±2%
Power Per Element200mWTemperature Coefficient±200pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Size / Dimension0.195" (4.95mm)	Number of Resistors	5
Temperature Coefficient±200ppm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Size / Dimension0.195" (4.95mm)	Number of Pins	10
Operating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package0.986" L x 0.100" W (25.04mm x 2.54mm)Size / Dimension0.195" (4.95mm)	Power Per Element	200mW
Applications-Applications-Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Temperature Coefficient	$\pm 200 ppm^{/\circ}C$
Mounting TypeThrough HolePackage / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Operating Temperature	-55°C ~ 125°C
Package / Case10-SIPSupplier Device Package10-SIPSize / Dimension0.986" L x 0.100" W (25.04mm x 2.54mm)Height - Seated (Max)0.195" (4.95mm)	Applications	-
Supplier Device Package 10-SIP Size / Dimension 0.986" L x 0.100" W (25.04mm x 2.54mm) Height - Seated (Max) 0.195" (4.95mm)	Mounting Type	Through Hole
Size / Dimension 0.986" L x 0.100" W (25.04mm x 2.54mm) Height - Seated (Max) 0.195" (4.95mm)	Package / Case	10-SIP
Height - Seated (Max) 0.195" (4.95mm)	Supplier Device Package	10-SIP
• • • • • • • • • • • • • • • • • • •	Size / Dimension	0.986" L x 0.100" W (25.04mm x 2.54mm)
Report errors?	Height - Seated (Max)	0.195" (4.95mm)
		Report errors?

EXB-F10V562G Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

EXB-F10V562G Payment Methods



EXB-F10V562G Shipping Methods



If you have any question about EXB-F10V562G, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com