

F-165P Information

Heisener.com	Part Number Manufacturer Category Description Package	F-165P Triad Magnetics Transformers Power Transformers PC MOUNT POWER TRANSFORMER - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




F-165P Specifications

Manufacturer Part NumberF-165PManufacturerTriad MagneticsCategoryTransformersPackage-Package-Stries-TypeLaminated CoreVoltage - PrimaryI15VVoltage - Secondary (Full Load)Parallel J0V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mASecondary Winding(s)SingleSecondary Winding(s)JualNouring TypeYesPower - Max1.5 VAMounting TypePrinary MidieSize / DimensionSingleSize / DimensionSingle MidieSize / DimensionSingle MidieSize / DimensionSingleSize / DimensionSingle<		
CategoryTransformersPackage-Series-TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeProlugh HoleSize / Dimension9.67mm L x 35.31mm WHeight - Seated (Max)3.015mmVoltage - Isolation1.50VrmsWeight0.219 lb (99.34g)	Manufacturer Part Number	F-165P
PackagePower TransformersPackage-Series-TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleSize / Dimension9.67mm Lx 35.31mm WSize / Dimension30.15mmYoltage - Isolation150VrmsWeight0.219 Ib (99.34g)	Manufacturer	Triad Magnetics
Package - Series - Type Laminated Core Voltage - Primary 115V Voltage - Secondary (Full Load) Parallel 9V, Series 24V Current - Output (Max) Parallel 100mA, Series 25mA Primary Winding(s) Single Secondary Winding(s) Dual Center Tap Yes Power - Max 1.5 VA Mounting Type Through Hole Size / Dimension 9267mm L x 35.31mm W Size / Dimension 30.15mm Voltage - Isolation 1500Vrms Weight 0.219 Ib (99.34g)	Category	Transformers
Series-TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination Style92 (PinSize / Dimension30.67mm L x 35.31mm WHeight - Seated (Max)500VrmsWotght500Vrms		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypePrincuph HoleTermination Style9.67mm L x 35.31mm WSize / Dimension3.05mmVoltage - Isolation1.50VrmsWeight0.219 lb (99.34g)	Package	-
SypeInterformVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Series	-
Voltage - Secondary (Full Load)Parallel 9V, Series 24VCurrent - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination Style92 FinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)1500VrmsVoltage - Isolation0.219 lb (99.34g)	Туре	Laminated Core
Current - Output (Max)Parallel 100mA, Series 25mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)1500VrmsVoltage - Isolation1500Vrms	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination Style9.67mm L x 35.31mm WSize / Dimension30.15mmHeight - Seated (Max)1500VrmsVoltage - Isolation0.219 lb (99.34g)	Voltage - Secondary (Full Load)	Parallel 9V, Series 24V
Secondary Winding(s)DualCenter TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)1500VrmsVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Current - Output (Max)	Parallel 100mA, Series 25mA
Center TapYesPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Primary Winding(s)	Single
Power - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Center Tap	Yes
Termination StylePC PinSize / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Power - Max	1.5 VA
Size / Dimension39.67mm L x 35.31mm WHeight - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Mounting Type	Through Hole
Height - Seated (Max)30.15mmVoltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.219 lb (99.34g)	Size / Dimension	39.67mm L x 35.31mm W
Weight 0.219 lb (99.34g)	Height - Seated (Max)	30.15mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.219 lb (99.34g)
		Report errors?



F-165P Guarantees

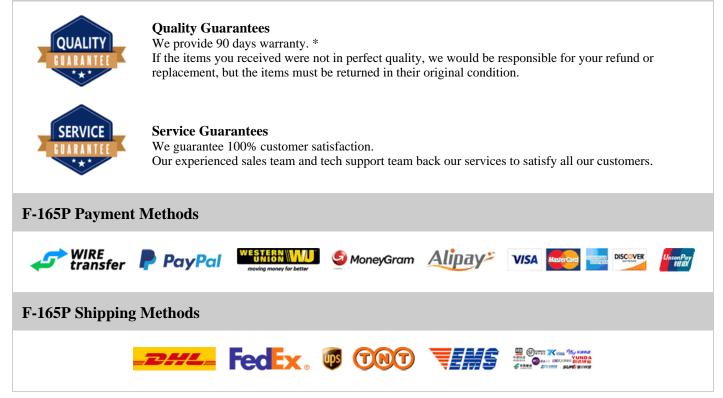

If you have any question about F-165P, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com