

F-333P

F-333P Information



Part Number	F-333P	
Manufacturer	Triad Magnetics	
Category	Transformers Power Transformers	
Description	POWER TRANSFORMER PCB MOUNT	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



F-333P Specifications

InterfactFinal ArgentiaCategoryTransformersPower TransformersPower TransformersPackage-SeriesSingle PrimaryTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualPower - Max1.5 VA		
CategoryTransformersPower TransformersPackagePackageSeriesSingle PrimaryTypeLaminated CoreVoltage - PrimaryVoltage - Secondary (Full Load)Parallel 15V, Series 30VVoltage - Secondary (Full Load)Parallel 100mA, Series 50mACurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)Secondary Winding(s)DualCenter TapPower - MaxMounting TypeThrough HoleSize / DimensionSize / DimensionHeight - Seated (Max)Voltage - IsolationWeightOutputWeightSet (Max)Set (Max) <td< td=""><td>Manufacturer Part Number</td><td>F-333P</td></td<>	Manufacturer Part Number	F-333P
Power TransformersPackage-SeriesSingle PrimaryTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500Vrms	Manufacturer	Triad Magnetics
Package-SeriesSingle PrimaryTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination StyleSeries 100 Mark 128.58mm WSize / Dimension34.93mm Lx 28.58mm WVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Category	Transformers
SeriesSingle PrimaryTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)1500VrmsWoitge - Isolation1020 UrmsWeight0.25 lb (113.4g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmWoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Package	-
Yoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmWoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Series	Single Primary
Voltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Туре	Laminated Core
Current - Output (Max)Parallel 100mA, Series 50mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Voltage - Secondary (Full Load)	Parallel 15V, Series 30V
Secondary Winding(s)DualCenter TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Current - Output (Max)	Parallel 100mA, Series 50mA
Center TapNoPower - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Primary Winding(s)	Dual
Power - Max1.5 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Center Tap	No
Termination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Power - Max	1.5 VA
Size / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Mounting Type	Through Hole
Height - Seated (Max)28.58mmVoltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.25 lb (113.4g)	Size / Dimension	34.93mm L x 28.58mm W
Weight 0.25 lb (113.4g)	Height - Seated (Max)	28.58mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	0.25 lb (113.4g)
		Report errors?

F-333P Guarantees

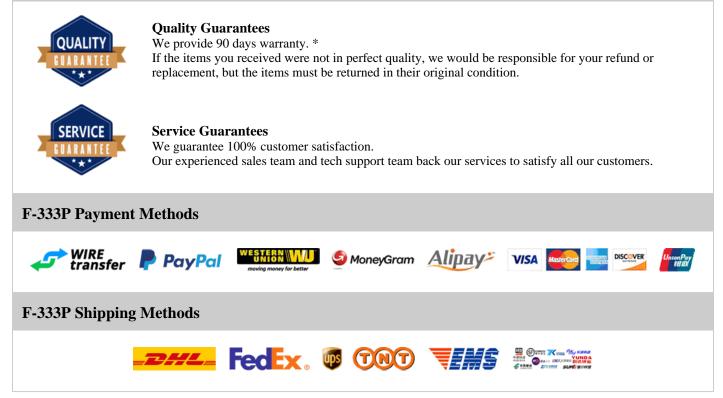

If you have any question about F-333P, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com