

F-59X

F-59X Information



 Part Number
 F-59X

 Manufacturer
 Triad Magnetics

 Category
 Transformers Power Transformers

 Description
 POWER XFMR CHASSIS MOUNT W/LEADS

 Package

 For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



F-59X Specifications

SeriesSingle SecondaryTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VA		
CategoryTransformersPackage-SeriesSingle SecondaryTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountSize / Dimension84.12mm Lx 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Manufacturer Part Number	F-59X
InterfactPower TransformersPackage-SeriesSingle SecondaryTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChasis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)1500VrmsWeight1.3 lbs (589.7g)	Manufacturer	Triad Magnetics
Package-SeriesSingle SecondaryTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChasis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)1500VrmsWienge Loading1500Vrms	Category	Transformers
SeriesSingle SecondaryTypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)VesPower - Max24 VAMounting TypeChasis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)150VrmsWotage - Isolation1500VrmsWeight1.3 lbs (589.7g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)1500VrmsWonght1.3 lbs (589.7g)	Package	-
Yoltage - Primary115VVoltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmWoltage - Isolation1.500VrmsWeight1.3 lbs (589.7g)	Series	Single Secondary
Voltage - Secondary (Full Load)60VCurrent - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Туре	Laminated Core
Current - Output (Max)400mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)1500VrmsVoltage - Isolation1.3 lbs (589.7g)	Voltage - Secondary (Full Load)	60V
Secondary Winding(s)SingleCenter TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Current - Output (Max)	400mA
Center TapYesPower - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Primary Winding(s)	Single
Power - Max24 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Secondary Winding(s)	Single
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Center Tap	Yes
Termination StyleWire LeadsSize / Dimension84.12mm L x 50.80mm WHeight - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Power - Max	24 VA
Size / Dimension 84.12mm L x 50.80mm W Height - Seated (Max) 49.20mm Voltage - Isolation 1500Vrms Weight 1.3 lbs (589.7g)	Mounting Type	Chassis Mount
Height - Seated (Max)49.20mmVoltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Termination Style	Wire Leads
Voltage - Isolation1500VrmsWeight1.3 lbs (589.7g)	Size / Dimension	84.12mm L x 50.80mm W
Weight 1.3 lbs (589.7g)	Height - Seated (Max)	49.20mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	1.3 lbs (589.7g)
		Report errors?

F-59X Guarantees

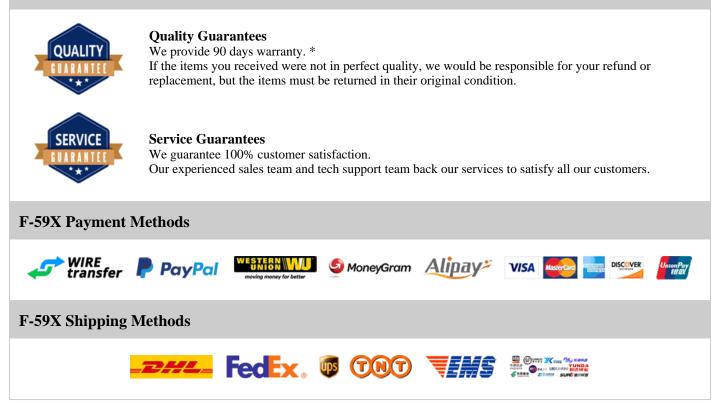

If you have any question about F-59X, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com