

FA26X7R2A105KNU00

FA26X7R2A105KNU00 Information

Heisener.com	 FA26X7R2A105KNU00 TDK Corporation Capacitors Ceramic Capacitors CAP CER MLCC X7R RADIAL Radial For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FA26X7R2A105KNU00 Specifications

ManufacturerTDK CorporationCapacitorsCaramic CapacitorsPackageRadialSeriesFACapacitanceµFColerance±10%Voltage - Rated100VPorentificient55°C ~ 125°COperating Temperature- 55°C ~ 125°CPackageAutomotiveApplications- 55°C ~ 125°CRatingsAEC-Q200Applications- 54°CPackage / Case- 61°CSite / Dimension100°LSite / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)- 62°CThickness (Max)0.197" (5.00mm)		
CapacitorsPackageRadialPackageRadialSeriesFACapacitanceIµFColerance±10%Voltage - Rated100 VPoperature Coefficient55° C ~ 125°COperating Temperature-55° C ~ 125°CPatters-RatingsAEC-Q200Applications-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)0.236" (6.00mm)Flickness (Max)0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Manufacturer Part Number	FA26X7R2A105KNU00
Ceramic CapacitorsPackageRadialSeriesFACapacitance1µFFolerance±10%Voltage - Rated100VDoperature CoefficientX7ROperating Temperature-55°C ~ 125°CPactures-RatingsAEC-Q200Applications-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Fhickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFACapacitanceIµFTolerance±10%Voltage - Rated100VTomperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Younting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Chack Spacing0.197" (5.00mm)Lead SpacingFormed Leads - Kinked	Category	Capacitors
FA Capacitance μF Tolerance ±10% Voltage - Rated 100V Temperature Coefficient X7R Operating Temperature -55°C ~ 125°C Features - Ratings AEC-Q200 Applications Automotive Failure Rate - Younging Type Through Hole Package / Case Radial Size / Dimension 0.236" (6.00mm) Height - Seated (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
CapacitanceIµFColprance±10%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°COperating Temperature-Features-RatingsAEC-Q200Applications-Mounting Type-Package / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Hickness (Max)0.36" (6.00mm)Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package	Radial
Polerance±10%Voltage - Rated100VPemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Lead Spacing6.197" (5.00mm)Lead StyleFormed Leads - Kinked	Series	FA
Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Capacitance	1µF
Femperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeatures-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	100V
Features-RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	X7R
RatingsAEC-Q200ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Height - Seated (Max)-Height	Operating Temperature	-55°C ~ 125°C
ApplicationsAutomotiveFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)0.236" (6.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)0.236" (6.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Ratings	AEC-Q200
Mounting TypeThrough HolePackage / CaseRadialPackage / Case0.217" L x 0.138" W (5.50mm x 3.50mm)Size / Dimension0.236" (6.00mm)Height - Seated (Max)0.236" (6.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Applications	Automotive
Package / CaseRadialSize / Dimension0.217" L x 0.138" W (5.50mm x 3.50mm)Height - Seated (Max)0.236" (6.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.217" L x 0.138" W (5.50mm x 3.50mm) Height - Seated (Max) 0.236" (6.00mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.236" (6.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Size / Dimension	0.217" L x 0.138" W (5.50mm x 3.50mm)
Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.236" (6.00mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
·	Lead Spacing	0.197" (5.00mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors

FA26X7R2A105KNU00 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FA26X7R2A105KNU00 Payment Methods

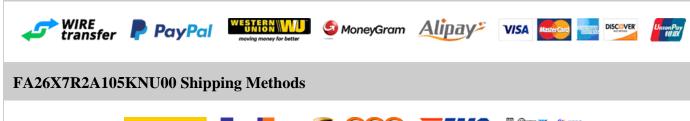



If you have any question about FA26X7R2A105KNU00, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com