


FE175D480M033FP-00

FE175D480M033FP-00 Information

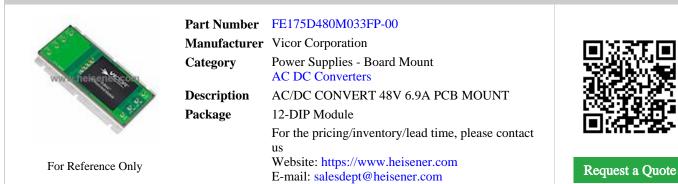

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FE175D480M033FP-00 Specifications

Manufacturer Part Number FE 175D480M033FP-00 Manufacturer Vicor Corporation Category Power Supplies - Board Mount AC DC Converters AC DC Converters Package 12-DIP Module Scries VI Brick? AC Front End Type Enclosed Number of Outputs 1 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 4 - Voltage - Output 5 - Voltage - Output 4		
CategoryPower Suplies - Board MountAC DC ConvertersPackage12-DIP ModuleSeriesVI Brick? AC Front EndTypeEnclosedNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 148VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Output 5-Output 6-Power (Watts)30WApplicationsITE (Commercial)FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-Porting Temperature-Pifciency94%Mounting TypeInough HolePickage / Case12-DIP ModuleSize / Dimension375" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Manufacturer Part Number	FE175D480M033FP-00
AC DC Converters Package 12-DIP Module Series VI Brick? AC Front End Type Enclosed Number of Outputs 1 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 5 - Voltage - Output 4 - Voltage - Output 4 - Power (Watts) GOP, OVP, OVP, SCP, UVLO Operating Temperature -5°C ~ 10°C Fea	Manufacturer	Vicor Corporation
Package12-DIP ModuleSeriesV1 Brick? AC Front EndTypeEnclosedNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 148VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 4-Voltage - Output 5-Voltage - Output 4-Voltage - Output 4-Voltage - Output 4-Power (Watts)69APower (Watts)30WApplicationsTE (Commercial)Porting Temperature-So [*] C ~ 100°C-Efficiency4%Mounting Type-Package / Case12-DIP ModuleSiz / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Category	Power Supplies - Board Mount
Series VI Brick? AC Front End Type Enclosed Number of Outputs 1 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Power (Wats) 6.9A Applications ITE (Commercial) Power (Wats) 30W Operating Temperature - OP, OTP, OVP, SCP, UVLO - Operating Temperature - Fifciency 94% Mounting Type - Package / Case 12-DIP Module Size / Dimension 3.55" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)		AC DC Converters
TypeEnclosedNumber of Outputs1Voltage - Input85 ~ 264 VACVoltage - Output 148VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 46.9ACurrent - Output (Max)6.9APower (Watts)TE (Commercial)Potenting Temperature0CP, OTP, OVP, SCP, UVLOOperating Temperature94%Mounting Type1-DIP ModulePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Package	12-DIP Module
Number of Outputs 1 Voltage - Input 85 ~ 264 VAC Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 4 - Current - Output (Max) 6.9A Power (Wats) 30W Applications ITE (Commercial) Features OCP, OTP, OVP, SCP, UVLO Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Series	VI Brick? AC Front End
Voltage - Input 85 ~ 264 VAC Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Output 4 - Current - Output (Max) 6.9A Power (Watts) 330W Applications ITE (Commercial) Features OCP, OTP, OVP, SCP, UVLO Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Туре	Enclosed
Voltage - Output 1 48V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 6.9A Power (Watts) 30W Applications ITE (Commercial) Features OCP, OTP, OVP, SCP, UVLO Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Number of Outputs	1
Voltage - Output 2-Voltage - Output 3-Voltage - Output 4-Current - Output (Max)6.9APower (Watts)330WApplicationsITE (Commercial)FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-55°C ~ 100°CEfficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Voltage - Input	85 ~ 264 VAC
Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 6.9A Power (Watts) 330W Applications ITE (Commercial) Features OCP, OTP, OVP, SCP, UVLO Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Voltage - Output 1	48V
Voltage - Output 4-Current - Output (Max)6.9APower (Watts)330WApplicationsITE (Commercial)FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-55°C ~ 100°CEfficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Voltage - Output 2	-
Current - Output (Max) 6.9A Power (Watts) 330W Applications ITE (Commercial) Features OCP, OTP, OVP, SCP, UVLO Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Voltage - Output 3	-
Power (Watts)330WApplicationsITE (Commercial)FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-55°C ~ 100°CEfficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Voltage - Output 4	-
ApplicationsITE (Commercial)FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-55°C ~ 100°CEfficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Current - Output (Max)	6.9A
FeaturesOCP, OTP, OVP, SCP, UVLOOperating Temperature-55°C ~ 100°CEfficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Power (Watts)	330W
Operating Temperature -55°C ~ 100°C Efficiency 94% Mounting Type Through Hole Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Applications	ITE (Commercial)
Efficiency94%Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Features	OCP, OTP, OVP, SCP, UVLO
Mounting TypeThrough HolePackage / Case12-DIP ModuleSize / Dimension3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Operating Temperature	-55°C ~ 100°C
Package / Case 12-DIP Module Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Efficiency	94%
Size / Dimension 3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)	Mounting Type	Through Hole
	Package / Case	12-DIP Module
Report errors?	Size / Dimension	3.75" L x 1.50" W x 0.38" H (95.3mm x 38.2mm x 9.6mm)
		Report errors?

FE175D480M033FP-00 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FE175D480M033FP-00 Payment Methods



If you have any question about FE175D480M033FP-00, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com