


FK11Y5V1H475Z

FK11Y5V1H475Z Information

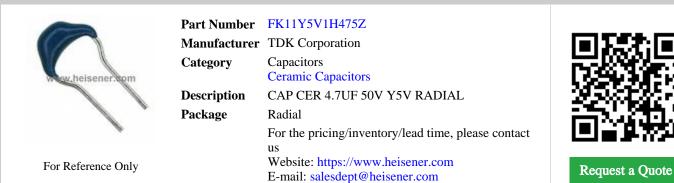

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK11Y5V1H475Z Specifications

ManufacturerTDK CorporationCapacitorsPackageRadialPackageRadialSeriesFKCapacitance4.7µFColaract50VYoltage - Rated50VOperating Temperature Coefficient90°C ~ 85°CPactangs- 30°C ~ 85°CRatings- 30°C ~ 81°CApplicationsGeneral PurposeFailure Rate- 30°C ~ 81°CMounting Type- 10°C and 10°CPackage / CaseRadialSiz / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)0.098" (2.50mm)		
CategoryCapacitorsPackageRadialPackageRadialSeriesFKCapacitance4.7µFColerance20%, +80%Voltage - Rated50VOperating Temperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CPattings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.00mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)6.008" (2.50mm)Lead SpacingFormed Leads - Kinked	Manufacturer Part Number	FK11Y5V1H475Z
ActionCeramic CapacitorsPackageRadialSeriesFKCapacitance4.7μFColerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingGonwal Case - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFKCapacitance4.7µFTolerance-20%, +80%Voltage - Rated50VTomperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.098" (2.50mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Series FK Capacitance 4.7μF Tolerance -20%, +80% Voltage - Rated 50V Tomperature Coefficient 50V Operating Temperature -30°C ~ 85°C Features - Ratings - Applications General Purpose Failure Rate - Nounting Type Through Hole Package / Case Radial Size / Dimension 0.217" L x 0.157" W (5.50mm x 4.00mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
Capacitance4.7µFTolerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6098" (2.50mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead StyleFormed Leads - Kinked	Series	FK
Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Capacitance	4.7μF
Temperature Coefficient Y5V (F) Operating Temperature -30°C ~ 85°C Features - Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Package / Case Radial Size / Dimension 0.217" L x 0.157" W (5.50mm x 4.00mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leads - Kinked	Tolerance	-20%, +80%
Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	Y5V (F)
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-30°C ~ 85°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.217" L x 0.157" W (5.50mm x 4.00mm)Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.217" L x 0.157" W (5.50mm x 4.00mm) Height - Seated (Max) 0.276" (7.00mm) Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.276" (7.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.217" L x 0.157" W (5.50mm x 4.00mm)
Lead Spacing0.098" (2.50mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.276" (7.00mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
•	Lead Spacing	0.098" (2.50mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

FK11Y5V1H475Z Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK11Y5V1H475Z Payment Methods





If you have any question about FK11Y5V1H475Z, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com