


FK22C0G2J223JN006

FK22C0G2J223JN006 Information

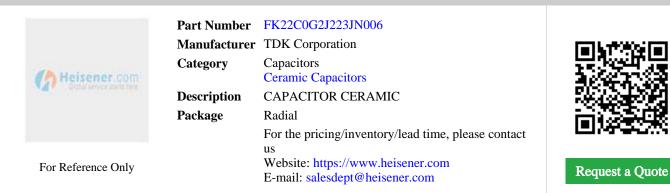

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK22C0G2J223JN006 Specifications

| Manufacturer Part NumberFK22C0G2J223JN006Manufacturer AntonTDK CorporationCapacitorsCapacitorsCaranic CapacitorsRadialPackageRadialCapacitance0.022µFColerance±5%Voltage - Rated630VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPactargs-ApplicationsGeneral PurposeFailure Rate-Failure Rate-Package / CaseRadialPackage / CaseRadial |
|---|
| CategoryCapacitorsCacamic CapacitorsPackageRadialPackageRadialSeriesFKCapacitance0.022µFFolerance±5%Voltage - Rated630VPerentificientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Wounting TypeThrough Hole |
| Ceranic CapacitorsPackageRadialSeriesFKCapacitance0.022µFFolerance±5%Voltage - Rated630VFemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPactangs-ApplicationsGeneral PurposeApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| PackageRadialPackageFKCapacitance0.022μFFolerance±5%Voltage - Rated630VCoperating Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Series FK Capacitance 0.022μF Folerance ±5% Voltage - Rated 630V Femperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Applications General Purpose Failure Rate - Mounting Type Through Hole |
| Capacitance0.022µFFolerance±5%Voltage - Rated630VFemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Folerance±5%Voltage - Rated630VFemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Voltage - Rated630VCemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Femperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Aounting TypeThrough Hole |
| Deperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough Hole |
| Failure Rate - Mounting Type Through Hole |
| Mounting Type Through Hole |
| |
| Package / Case Radial |
| |
| Size / Dimension 0.295" L x 0.157" W (7.50mm x 4.00mm) |
| Height - Seated (Max) 0.315" (8.00mm) |
| Fhickness (Max) - |
| Lead Spacing 0.197" (5.00mm) |
| Lead Style Formed Leads - Kinked |
| Report errors? |

FK22C0G2J223JN006 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK22C0G2J223JN006 Payment Methods





If you have any question about FK22C0G2J223JN006, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com