


FK28C0G1H150J

FK28C0G1H150J Information

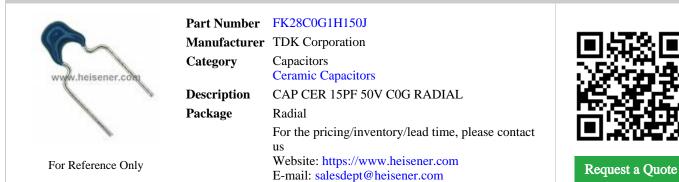

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK28C0G1H150J Specifications

Manufacturer Part Number FK28C0G1H150J Manufacturer TDK Corporation Category Capacitors Caramic Capacitors Ceramic Capacitors Package Radial Series FK Capacitance 15pF Tolerance ±5% Voltage - Rated 500 Operating Temperature 050° A 125°C Operating Temperature -55°C ~ 125°C Factures - Applications General Purpose Factures - Mounting Type Through Hole Nourting Type Intrough Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.17" (5.50mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm)		
CapacityCapacityPackageRadialSeriesCapacitanceCapacitanceColoranceSolvanceVoltage - RatedSolvanceCoperating CoefficientOperating Temperature CoefficientSolvanceSolvanceSolvanceSolvanceOperating TemperatureSolvance<	Manufacturer Part Number	FK28C0G1H150J
Ceranic CapacitorsPackageRadialSeriesFKCapacitance15pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.217" (5.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFKCapacitance15pFTolerance5%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Constraint FK Capacitance 15pF Tolerance ±5% Voltage - Rated 50V Temperature Coefficient C0G, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Nounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
Capacitance15pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±5%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Series	FK
Voltage - Rated50VTemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.197" (5.00mm)Lead SpacingDing" L Souties - Kinked	Capacitance	15pF
Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Tolerance	±5%
Operating Temperature.55°C ~ 125°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadiaSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Fad StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.157" L x 0.098" W (4.00mm x 2.50mm)
Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.217" (5.50mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
•	Lead Spacing	0.197" (5.00mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

FK28C0G1H150J Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK28C0G1H150J Payment Methods



FK28C0G1H150J Shipping Methods



If you have any question about FK28C0G1H150J, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com