


FK28C0G1H222J

FK28C0G1H222J Information

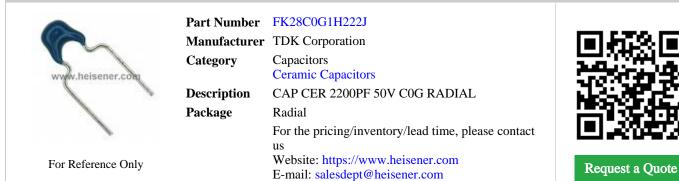

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK28C0G1H222J Specifications

Manufacturer Part Number FK28C0G1H222J Manufacturer TDK Corporation Category Capacitors Package Radial Series FK Capacitance 200pF Tolerance ±5% Voltage - Rated 50V Operating Temperature 05C, NP0 Operating Temperature -55°C - 125°C Factures - Applications General Purpose Applications General Purpose Factures (Agax) Jong Hole Package / Case Radial Size / Dimension 0.157° L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm)		
CapacitorsPackageRadialSeriesRadialCapacitance200pFCapacitance200pFTolerance5%Voltage - Rated00Tomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPactures-Ratings-0ApplicationsGeneral PurposePailure Rate-Mounting TypeNinough HolePackage / CaseAidalSiz / Dimension0.15° L x 0.098° W (4.00mm x 2.50mm)Height - Seated (Max)0.21° (5.50mm)Height - Seated (Max)0.19° (5.00mm)Lead Spacing0.19° (5.00mm)Lead SpacingFormed Leads - Kinked	Manufacturer Part Number	FK28C0G1H222J
Ceramic CapacitorsPackageRadialSeriesFKCapacitance200pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFKCapacitance200pFTolerance±5%Voltage Rated50VTemperature CoefficientC0G, NP0Operating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFolume Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.157° L x 0.098° W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.217° (5.50mm)Lead Spacing0.197° (5.00mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Series FK Capacitance 2200pF Tolerance ±5% Voltage - Rated 50V Temperature Coefficient C0G, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Nourting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leades - Kinked		Ceramic Capacitors
Capacitance2200pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±5%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting TypeMaidPackage / CaseRatialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Hickness (Max)0.197" (5.00mm)Lead SpacingDimensionHead StyleSimen Leades - Kinked	Series	FK
Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.197" (5.00mm)Lead SpacingFormed Leads - Kinked	Capacitance	2200pF
Temperature Coefficient C0G, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Tolerance	±5%
Operating Temperature.55°C ~ 125°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadiaSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Head Style-	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)0.197" (5.00mm)Lead Spacing0.197" (5.00mm)Height - Seated (Max)0.197" (5.00mm)Height - Seated (Max)None Height - Seated (Max)Height - Seated (Max)None Height - Seated (Max)<	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.157" L x 0.098" W (4.00mm x 2.50mm)
Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.217" (5.50mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
•	Lead Spacing	0.197" (5.00mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

FK28C0G1H222J Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK28C0G1H222J Payment Methods



FK28C0G1H222J Shipping Methods



If you have any question about FK28C0G1H222J, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com