


FK28Y5V1H104Z

FK28Y5V1H104Z Information

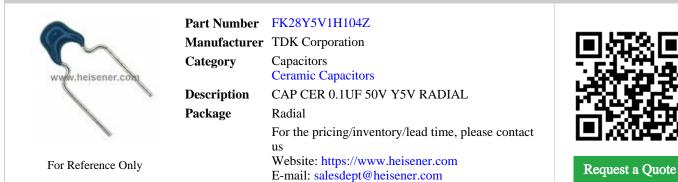

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FK28Y5V1H104Z Specifications

Manufacturer Part Number FK28YSV1H1042 Manufacturer TDK Corporation Category Capacitors Package Radial Package Radial Series FK Capacitance .01µF Tolerance .20%, +80% Voltage - Rated 5V (F) Operating Temperature Coefficient SV (F) Operating Temperature .30°C < 85°C Features . Applications General Purpose Faiture Rate . Mounting Type Through Hole Size / Dimension 0.17" (5.50mm) Height - Seated (Max) .217" (5.50mm) Thickness (Max) .1097" (5.00mm)		
Action Capacitors Package Radial Series Radial Capacitance INF Capacitance 0.1µF Tolerance 20%, +80% Voltage - Rated 50V Tomperature Coefficient 50V Operating Temperature -30°C ~ 85°C Ratings -30°C ~ 85°C Ratings -6meral Purpose Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Faight - Seated (Max) 0.217" (5.50mm) Height - Seated (Max) 0.217" (5.00mm) Lead Spacing 0.30" (5.00mm)	Manufacturer Part Number	FK28Y5V1H104Z
Indext of Caranic CapacitorsPackageRadialSeriesFKCapacitance0.1μFTolerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Fickness (Max)-Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Manufacturer	TDK Corporation
PackageRadialSeriesFKCapacitance0.1µFTolerance-20%,+80%Voltage Rated50VTemperature Coefficient50VOperating Temperature-30°C ~ 85°CFeatures-30°C ~ 85°CRatings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMoltage HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Fickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
x x Series FK Capacitance 0.1μF Tolerance -20%, +80% Voltage - Rated 50V Temperature Coefficient 50V Operating Temperature -30°C ~ 85°C Features - Ratings - Applications General Purpose Failure Rate - Nounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
Capacitance0.1µFTolerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance-20%, +80%Voltage - Rated50VTemperature CoefficientY5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Series	FK
Voltage - Rated50VTemperature CoefficientV5V (F)Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)0.197" (5.00mm)Lead Spacing0.197" (5.00mm)Head StyleFormed Leads - Kinked	Capacitance	0.1µF
Temperature Coefficient Y5V (F) Operating Temperature -30°C ~ 85°C Features - Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Tolerance	-20%, +80%
Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadiaSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.197" (5.00mm)Lead Style.Formed Leader Stiller.Formed Leader Stiller.Formed Leader Stiller. <td>Temperature Coefficient</td> <td>Y5V (F)</td>	Temperature Coefficient	Y5V (F)
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Height - Seated (Max)5.019" (5.00mm)Height - Seated (Max)6.197" (5.00mm)	Operating Temperature	-30°C ~ 85°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)0.197" (5.00mm)Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.157" L x 0.098" W (4.00mm x 2.50mm)Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.157" L x 0.098" W (4.00mm x 2.50mm) Height - Seated (Max) 0.217" (5.50mm) Thickness (Max) - Lead Spacing 0.197" (5.00mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.217" (5.50mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.157" L x 0.098" W (4.00mm x 2.50mm)
Lead Spacing0.197" (5.00mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.217" (5.50mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.197" (5.00mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

FK28Y5V1H104Z Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FK28Y5V1H104Z Payment Methods





If you have any question about FK28Y5V1H104Z, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com