


FL11T20

FL11T20 Information



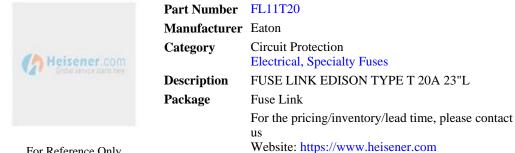

Request a Quote

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FL11T20 Specifications

ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageFuse LinkSeriesEdison?Fuse TypeSue LinkCurrent Rating20AVoltage Rating - AC27000V (27kV)Voltage Rating - DCSowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Monting TypeFinough HolePackage / CaseSure LinkPackage / Case-Package / Case-Package / Case-Package / CaseFinough HolePackage / CaseFinough HolePackage / CaseFinough Link		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageFuse LinkSeriesEdison?Fuse TypeFuse LinkCurrent Rating20AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseSusSize / Dimension10,50° Dia x 23.00° L (19.05mm x 584.20mm)	Manufacturer Part Number	FL11T20
Bit of the second sec	Manufacturer	Eaton
PackageFuse LinkSeriesEdison?Fuse TypeFuse LinkCurrent Rating20AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Type-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseGursy CaseSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Category	Circuit Protection
SeriesEdison?Fuse TypeFuse LinkCurrent Rating20AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)		Electrical, Specialty Fuses
Fuse TypeFuse LinkCurrent Rating20AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Package	Fuse Link
Current Rating20ACurrent Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Series	Edison?
Voltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Fuse Type	Fuse Link
Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFinough HolePackage / CaseFise LinkSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Current Rating	20A
Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Voltage Rating - AC	27000V (27kV)
ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Voltage Rating - DC	-
Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Response Time	Slow
Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkStee / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Applications	Electrical, Industrial
Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Class	-
Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Approvals	-
Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Operating Temperature	-
Package / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Breaking Capacity @ Rated Voltage	-
Size / Dimension 0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Mounting Type	Through Hole
	Package / Case	Fuse Link
Report errors?	Size / Dimension	0.750" Dia x 23.00" L (19.05mm x 584.20mm)
		Report errors ⁶

E-mail: salesdept@heisener.com

FL11T20 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

RVICE Sei

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FL11T20 Payment Methods Image: Imag

If you have any question about FL11T20, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com