

# FL11T3

#### **FL11T3 Information**



Part Number	FL11T3	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE LK CPS T 003A NRB 23"	
Package	Fuse Link	
	For the pricing/inventory/lead time, please contact	
us		
	Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **FL11T3 Specifications**

CategoryCircuit Protection Electrical, Specialty FusesPackageFuse LinkPackageEdison?Fuse TypeFuse LinkCurrent RatingSAVoltage Rating - AC27000V (27kV)Voltage Rating - DCSlowResponse TimeSlowApplicationsElectrical, IndustrialFatures-Class-Approvals-Operating Temperature-Mounting Type-Package/ CaseFuse LinkFactors-Starters-Operating Type-Starters-Starters-Operating Temperature-Starters-S		
CategoryCircuit Protection Electrical, Specialty FusesPackageFuse LinkPackageEdison?Fuse TypeFuse LinkCurrent RatingSAVoltage Rating - AC27000V (27kV)Voltage Rating - DCSlowResponse TimeSlowApplicationsElectrical, IndustrialFatures-Class-Approvals-Operating Temperature-Mounting Type-Package/ CaseFuse LinkFactors-Starters-Operating Type-Starters-Starters-Operating Temperature-Starters-S	Manufacturer Part Number	FL11T3
Beckrical, Specialty FusesPackageFuse LinkSeriesEdison?Fuse TypeFuse LinkCurrent Rating3AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0,500" Li (19.05mm x 584.20mm)	Manufacturer	Eaton
PackageFuse LinkSeriesEdison?Fuse TypeFuse LinkCurrent Rating3AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseSucy Through HoleSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Category	Circuit Protection
Series Edison?   Fuse Type Fuse Link   Current Rating 3A   Voltage Rating - AC 27000V (27kV)   Voltage Rating - DC -   Response Time Slow   Applications Electrical, Industrial   Features -   Class -   Approvals -   Operating Temperature -   Breaking Capacity @ Rated Voltage -   Mounting Type Through Hole   Package / Case Fuse Link		Electrical, Specialty Fuses
Fuse TypeFuse LinkCurrent Rating3AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Package	Fuse Link
Current Rating3AVoltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseSuse / DimensionSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Series	Edison?
Voltage Rating - AC27000V (27kV)Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseG.750" Dia x 23.00" L (19.05mm x 584.20mm)	Fuse Type	Fuse Link
Yoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseSuse LinkSize / Dimension0,750" Dia x 23.00" L (19.05mm x 584.20mm)	Current Rating	3A
Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Voltage Rating - AC	27000V (27kV)
ApplicationsElectrical, IndustrialApplications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Voltage Rating - DC	-
Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Response Time	Slow
Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Applications	Electrical, Industrial
Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Class	-
Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Approvals	-
Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Operating Temperature	-
Package / CaseFuse LinkSize / Dimension0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Breaking Capacity @ Rated Voltage	-
Size / Dimension 0.750" Dia x 23.00" L (19.05mm x 584.20mm)	Mounting Type	Through Hole
	Package / Case	Fuse Link
Report errors?	Size / Dimension	0.750" Dia x 23.00" L (19.05mm x 584.20mm)
		Report errors?

#### **FL11T3 Guarantees**

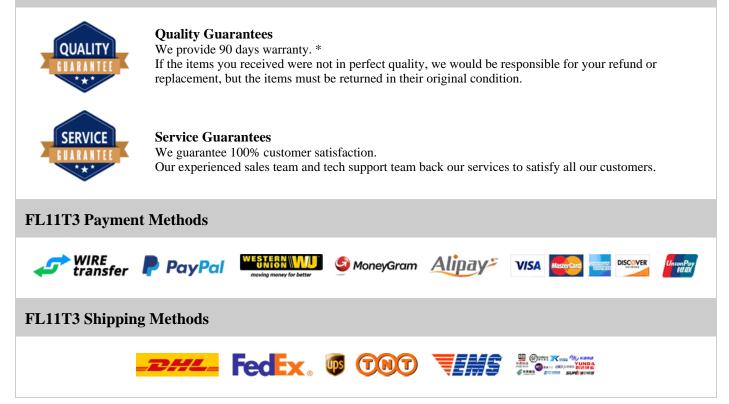

If you have any question about FL11T3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com