

FLE-110-01-G-DV-K

FLE-110-01-G-DV-K Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FLE-110-01-G-DV-K Specifications

Manufacturer Part NumberFLE-110-01-G-DV-KManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnaccor TypeReceptacle SocketContact TypeBoard to Board or CableNumber of Positions20Number of Positions LoadedAllNumber of Rows2Number of Rows0.050° (1.27mm)Number of RowsSolderTerninationSolderStriage TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldStriage TypeSolderStriage TypeSolderStriage TypeSolderStriage TypeSolderContact Finish - MatingJolderContact Finish - MatingGoldContact Finish - MatingJolderStriage TypeSolderContact Finish - MatingJolderContact Finish - MatingJolderContact Finish - MatingJolderStriage TypeSolderStriage TypeSolderContact Finish Thickness - MatingJolderIsulation ColorBackIsulation HeightJol72° (4.37mm)Contact Finish Finish - SolderSolderStriage TypeSolderStriage TypeSolderStriage TypeSolderStriage TypeSolderStriage TypeSolderStriage TypeSolder </th <th></th> <th></th>		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series FLE Connector Type Receptacle Contact Type Receptacle Contact Type Board to Board or Cable Number of Positions 20 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type Solder Yeare Mount Solder Fastening Type Solder Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Sultation Color Black Insulation Height 0.172" (4.37mm) Contact Length - Post - Operating Temperature -55°C ~ 125°C	Manufacturer Part Number	FLE-110-01-G-DV-K
ActionRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFarminationSolderFastening TypeOldContact Finish - MatingGoldContact Finish Thickness - MatingIlpin (0.25µm)Insulation ColorIlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects
SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSurface MountYerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldSustaion ColorBiackInsulation ColorBiackInsulation Height0.172° (4.37mm)Contact Engh - Post-Operating Temperature-Solor-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - Mating0.50° (1.27mm)Mounting TypeSuface MountTerminationSolderFastening TypeSolderContact Finish - MatingGoldSustation ColorBlackInsulation ColorJorn? (4.37mm)Contact Length - Post-Operating Temperature-Solor- <td>Package</td> <td>-</td>	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating0.051Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	FLE
StyleBoard to Board or CableNumber of Positions20Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 20 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Fermination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Iupin (0.25µm) Insulation Color Black Insulation Height 0.172" (4.37mm) Contact Length - Post - Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-55°C ~ 125°C	Number of Positions	20
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.172" (4.37mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10μin (0.25μm)
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.172" (4.37mm)
	Contact Length - Post	-
Material Flammability Rating -	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	-

Contact Finish - Post	Gold
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

FLE-110-01-G-DV-K Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FLE-110-01-G-DV-K Payment Methods

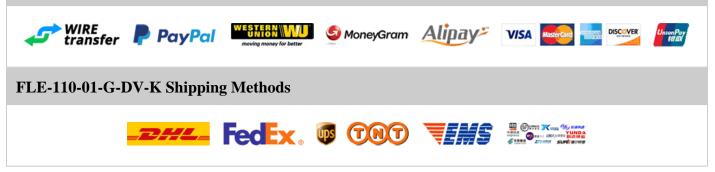

If you have any question about FLE-110-01-G-DV-K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com