

FLE-119-01-G-DV

FLE-119-01-G-DV Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FLE-119-01-G-DV Specifications

Manufacturer Part NumberFLE-119-01-G-DVManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-Package-SeriesFLEConnector TypeReceptacles, Female SocketsContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Rows2Number of Rows0.050° (1.27mm)Muning TypeSolderMuning TypeSolderStatening TypeSolderStatening TypeSolderContact Finish ThatingGoldContact Finish ThatingGoldStatening TypeBaskStatening TypeSolderStatening TypeSolderStatening TypeSolderContact Finish ThatingGoldContact Finish ThatingGoldContact Finish ThatingSolderStation ColorJin/2*(4.37mm)Contact Length -Post-5%C ~ 125%C		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleConnector TypeReceptacleContact TypeBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSolderFerminationSolderForta Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.12° (4.37mm)Contact Length - Post-SolderSolderSolderSolderContact Finish Thickness - MatingSolderContact Finish Thickness - MatingSolderSolderSolderSolderSolderContact Finish Thickness - MatingSolderSold	Manufacturer Part Number	FLE-119-01-G-DV
Iccangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllNumber of Rows2Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)Number of PositionsSuface MountNumber of Rows0.50° (1.27mm)Number of RowsSuface MountPositions TypeSuface MountNotifier TypeSuface Mount	Manufacturer	Samtec Inc.
Package-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingSolderContact Finish - MatingGoldSundard ColorJuni (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSufface MountContact Finish - MatingGoldContact Finish - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonator Finish - MatingJupi (0.25µm)Insulation ColorBlackInsulation Height0.12" (4.37mm)Contact Length - Post-	Series	FLE
StyleBoard to Board or CableNumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingIOpin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions38Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIupin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Positions	38
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI0µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1/uin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.172" (4.37mm)Contact Length - Post-	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.172" (4.37mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating -	Material Flammability Rating	-

Contact Finish - Post	Gold
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

FLE-119-01-G-DV Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FLE-119-01-G-DV Payment Methods

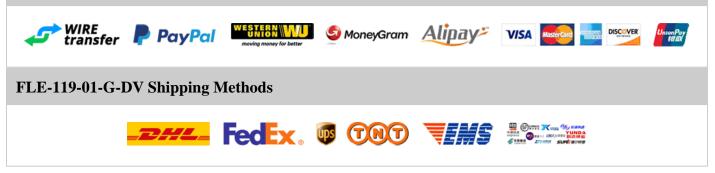

If you have any question about FLE-119-01-G-DV, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com