

FLE-128-01-H-DV-P

FLE-128-01-H-DV-P Information

Heisener.com	Part Number Manufacturer Category Description Package	FLE-128-01-H-DV-P Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets .050 MICRO STRIPS	
For Reference Only	гаскаде	For the pricing/inventory/lead time, please contact	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FLE-128-01-H-DV-P Specifications

Manufacturer Part NumberFLE-128-01-H-DV-PManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleContact TypeReceptacleStyleBoard to Board or CableNumber of Positions LoadedAlPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSulface MountFastening TypePush-PullContact Finish - MatingSolderIsulation ColorBlackIsulation ColorBlackIsulation Finish Thickness - MatingSolderIsulation Height0.172" (4.37mm)Contact Length - Post-Solder Ser 215°C-		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleConnector TypeReceptacleContact TypeBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows2Row Spacing - MatingSolderYouring TypeSolderFerminationSolderFortaring TypeSolderContact Finish - MatingGoldContact Finish - MatingGuldSolderSoldenFinish - MatingSoldenFinish - MatingGoldContact Finish - MatingGuldSolator ColorBlackInsulation ColorBlackSolator SolatorSolatorFinish Thickness - MatingSolatorContact Finish PostSolatorSolator SolatorSolatorSolator SolatorSolatorSolatorSolator <td>Manufacturer Part Number</td> <td>FLE-128-01-H-DV-P</td>	Manufacturer Part Number	FLE-128-01-H-DV-P
Icetanguar Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of PositionsS6Number of Positions LoadedAllNumber of Rows2Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)Number of Rows0.50° (1.27mm)FerninationSocketPoster Straing TypeSocketOrdact Finish FundationSocketContact Finish FundationSocketInstation ColorBiakInstation ColorBickInstation Straing0.50° (1.27mm)Instation StraingSocketSocket Finish FundationSocketInstation StraingSocketInstation StraingSocket	Manufacturer	Samtec Inc.
Package-SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of PositionsS6Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - MatingSolof' (1.27mm)Mounting TypeSolof' (1.27mm)FreminationSolof' (1.27mm)FreminationSolof' (1.27mm)Forther TypeSolof' (1.27mm)Forther TypeSolof	Category	Connectors, Interconnects
SeriesFLEConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting TypeSurface MountFastening TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.172° (4.37mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Field1.27" (4.37mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.12" (4.37mm)Contact Length - Post.	Series	FLE
StyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationSurface MountFastening TypeSolderFontact Finish - MatingGoldContact Finish - MatingJoin (0.76µm)Insulation ColorJiakInsulation Height0.172" (4.37mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions 56 Number of Positions Loaded All Pitch - Mating 0.050" (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type 0.050" (1.27mm) Formination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Insulation Color Black Insulation Height 0.172" (4.37mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Positions	56
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3/µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.172" (4.37mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.172" (4.37mm)Contact Length - Post-	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.172" (4.37mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating -	Material Flammability Rating	-

Contact Finish - Post	Gold
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place

Report errors?

FLE-128-01-H-DV-P Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FLE-128-01-H-DV-P Payment Methods

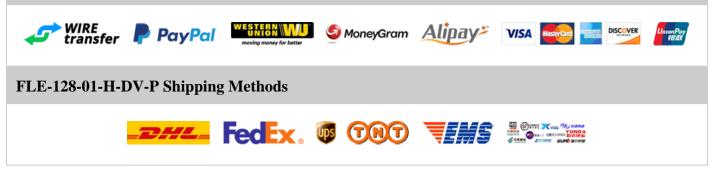

If you have any question about FLE-128-01-H-DV-P, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com