

FMC15DRES-S13

st a Quote

FMC15DRES-S13 Information

Heisener.com	Part Number	FMC15DRES-S13	
	Manufacturer	Sullins Connector Solutions	
	Category	Connectors, Interconnects Card Edge Connectors - Edgeboard Connectors	
	Description	CONN EDGE DUAL FMALE 30POS 0.100	- 5
	Package	-	
		For the pricing/inventory/lead time, please contact	
		US Wabaita, https://www.baisanan.com	
For Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Re

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FMC15DRES-S13 Specifications

Manufacturer Part Number FMC15DRES-S13 Manufacturer Sullins Connector Solutions Category Connectors, Interconnects Card Edge Connectors - Edgeboard Connectors Card Edge Connectors - Edgeboard Connectors Package - Series - Gender Non Specified - Dual Edge Mumber of Positions/Bay/Row Female Number of Positions/Bay/Row 30 Card Thickness 0.062° (1.57mm) Number of Rows 2 Pitch 0.100° (2.54mm) Features Goald Edge, Straddle Mount Solider Eyelet(s) Solider Eyelet(s) Contact Material Solidor Coffum) Contact Finish Thickness Goidy (0.76µm) Contact Finish Thickness Solidor IG Contact Finish Thickness Solidor IG Contact Type Feul Bellows Color Green Flange Feature Side Mount Opening, Unthreaded, 0.125° (3.18mm) Dia	_		
CategoryConnectors, InterconnectsCard Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062° (1.57mm)Number of Rows2Pitch0.100° (2.54mm)Number of Rows0.100° (2.54mm)FeaturesGoald Edge, Straddle MountNounting TypeSolder Eyelet(s)Contact MaterialSilondaContact Finish ThicknessGoldContact TypeFellelowsContact TypeSupin (0.76µm)Contact TypeGuel MountContact TypeSilon (0.76µm)Contact TypeSilon (0.76µm)Contact TypeGuel MountContact TypeSilon (0.76µm)Contact	Manufacturer Part Number	FMC15DRES-S13	
Card Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard Edge Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsCotact TypeSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-56" C~ 200°C	Manufacturer	Sullins Connector Solutions	
Package-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsContact TypeSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature65°C ~ 20°C	Category	Connectors, Interconnects	
Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact Finish Thickness30µin (0.76µm)Contact Finish ThicknessGoldContact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C		Card Edge Connectors - Edgeboard Connectors	
Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountContact MaterialSpinodalContact Finish ThicknessGoldContact Finish ThicknessSpinodalContact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOpenating Temperature-65°C ~ 200°C	Package	-	
GenderFemaleNumber of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Series	-	
Number of Positions/Bay/Row15Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Card Type	Non Specified - Dual Edge	
Number of Positions30Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Gender	Female	
Card Thickness0.062" (1.57mm)Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact Finish ThicknessGoldContact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Number of Positions/Bay/Row	15	
Number of Rows2Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Number of Positions	30	
Pitch0.100" (2.54mm)FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact Finish ThicknessGoldContact Finish ThicknessSupin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Card Thickness	0.062" (1.57mm)	
FeaturesCard ExtenderMounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Number of Rows	2	
Mounting TypeBoard Edge, Straddle MountTerminationSolder Eyelet(s)Contact MaterialSpinodalContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Pitch	0.100" (2.54mm)	
TerminationSolder Eyelet(s)Contact MaterialSpinodalContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Features	Card Extender	
Contact MaterialSpinodalContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Mounting Type	Board Edge, Straddle Mount	
Contact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Termination	Solder Eyelet(s)	
Contact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Contact Material	Spinodal	
Contact TypeFull BellowsColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Contact Finish	Gold	
ColorGreenFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Contact Finish Thickness	30µin (0.76µm)	
Flange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 200°C	Contact Type	Full Bellows	
Operating Temperature $-65^{\circ}\text{C} \sim 200^{\circ}\text{C}$	Color	Green	
	Flange Feature	Side Mount Opening, Unthreaded, 0.125" (3.18mm) Dia	
Report errors?	Operating Temperature	$-65^{\circ}\mathrm{C} \sim 200^{\circ}\mathrm{C}$	
		Report errors?	

FMC15DRES-S13 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FMC15DRES-S13 Payment Methods

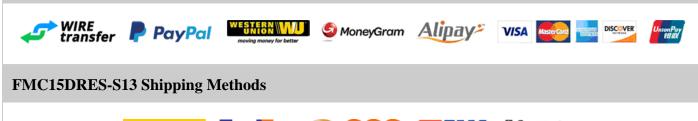



If you have any question about FMC15DRES-S13, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com