

# **FNQ-20**

## **FNQ-20 Information**



For Reference Only

Part Number	FNQ-20	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 20A 500VAC 5AG	
Package	5AG, 10mm x 38.1mm	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **FNQ-20 Specifications**

ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmPackageFNQFuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature10kAManufactures10kAPackage / Case5AG, 10mm x 38.1mm		
CategoryCircui ProtectionCategoryElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmPackageFNQFuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer Part Number	FNQ-20
ConstructionElectrical, Specialty FusesPackage5AG, 10mm x 38.1mmSeriesFNQFuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating TemperatureIokAMounting TypeHolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0,406" Dia x 1.500" L (10.30mm x 38.10mm)	Manufacturer	Eaton
Package5AG, 10mm x 38.1mmSeriesFNQFuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Category	Circuit Protection
SeriesFNQFuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting Type5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating20AVoltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated VoltageIokAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Package	5AG, 10mm x 38.1mm
Current Rating20ACurrent Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Series	FNQ
Voltage Rating - AC500VVoltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Current Rating	20A
Response TimeSlowApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeFolderPackage / CaseSAG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - AC	500V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, CSA, ULOperating Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Voltage Rating - DC	-
Features-Features-Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Response Time	Slow
Class-ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Class	-
Breaking Capacity @ Rated Voltage10kAMounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Approvals	CE, CSA, UL
Mounting TypeHolderPackage / Case5AG, 10mm x 38.1mmSize / Dimension0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Operating Temperature	-
Package / Case 5AG, 10mm x 38.1mm   Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Breaking Capacity @ Rated Voltage	10kA
Size / Dimension 0.406" Dia x 1.500" L (10.30mm x 38.10mm)	Mounting Type	Holder
	Package / Case	5AG, 10mm x 38.1mm
Report errors?	Size / Dimension	0.406" Dia x 1.500" L (10.30mm x 38.10mm)
		Report errors

#### **FNQ-20** Guarantees

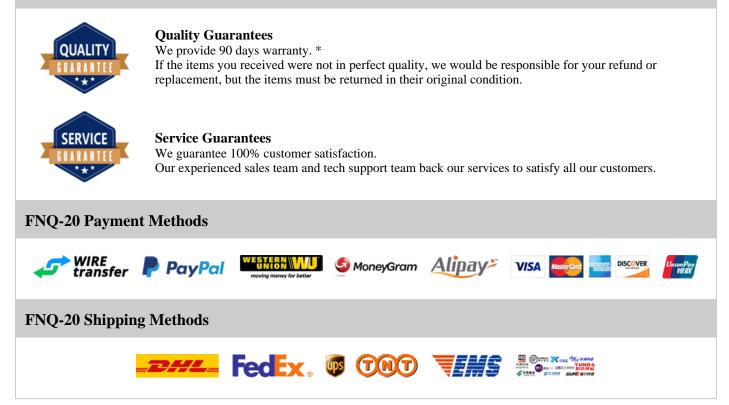

If you have any question about FNQ-20, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com