

FOLC-115-04-S-Q

FOLC-115-04-S-Q Information

Heisener.com	Part Number Manufacturer Category	FOLC-115-04-S-Q Samtec Inc. Connectors, Interconnects	
	Description	Rectangular Connectors - Headers, Receptacles, Female Sockets .050" X .050 SOCKET STRIP	
	Package	-	「回認疑報」
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FOLC-115-04-S-Q Specifications

Manufacturer Part NumberFOLC-115-04-S-QManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFOURRAY? FOLCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPrich - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuid (0.6µm)Contact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation ColorBlack	Manufacture Deut Norschau	EQL C 115 04 8 O
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFOURRAY? FOLCConnector TypeReceptacleContact TypeReceptacleStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPich - Mating0.500° (1.27mm)Number of Rows4Number of Rows0.500° (1.27mm)Number of Rows0.500° (1.27mm)Number of RowsSolderForninationSolderForninationSolderForninationGoldContact Finish - MatingGoldIonate Finish - MatingSolje (1.27mm)Statening TypeSolderFastening TypeSolderFininationSolderFininationSolderIonate Finish - MatingSolje (1.67mm)Ionate Finish - MatingSolderFinish - MatingSolderIonate Finish - MatingSolderIonate Finish - MatingSolje (1.67mm)Ionate Finish - MatingSolje (1		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesFOURRAY? FOLCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOsldContact Finish - MatingGoldContact Finish Thickness - MatingBiack	Manufacturer	Samtec Inc.
Package-SeriesFOURRAY? FOLCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.50° (1.27mm)Number of Rows4Row Spacing - Mating0.50° (1.27mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlack	Category	Connectors, Interconnects
SeriesFOURRAY? FOLCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows4Row Spacing - Mating0.050° (1.27mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish Thickness - MatingBiack	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish - MatingBlack	Series	FOURRAY? FOLC
StyleBoard to BoardStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlack	Connector Type	Receptacle
Number of Positions60Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeO1050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlack	Contact Type	Female Socket
Number of Positions LoadedAllNumber of Rows0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Style	Board to Board
Pitch - Mating0.050" (1.27mm)Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting Type0.050" (1.27mm)TerminationForough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlack	Number of Positions	60
Number of Rows4Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Pitch - Mating	0.050" (1.27mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Number of Rows	4
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlack	Termination	Solder
Contact Finish Thickness - Mating30μin (0.76μm)Insulation ColorBlack	Fastening Type	Push-Pull
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	30µin (0.76µm)
Insulation Height 0.180" (4.57mm)	Insulation Color	Black
	Insulation Height	0.180" (4.57mm)
Contact Length - Post 0.120" (3.05mm)	Contact Length - Post	0.120" (3.05mm)
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

FOLC-115-04-S-Q Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FOLC-115-04-S-Q Payment Methods

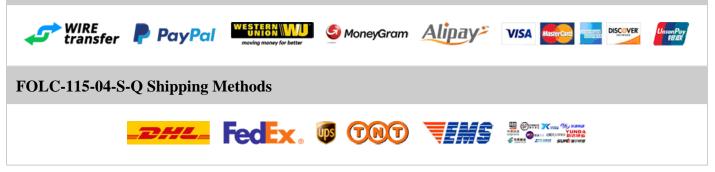

If you have any question about FOLC-115-04-S-Q, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com