

# FOLC-140-L2-S-Q-LC-P

## FOLC-140-L2-S-Q-LC-P Information

| Heisener.com       | Manufacturer<br>Category<br>Description | FOLC-140-L2-S-Q-LC-P<br>Samtec Inc.<br>Connectors, Interconnects<br>Rectangular Connectors - Headers, Receptacles,<br>Female Sockets<br>.050" X .050 SOCKET STRIP |                 |
|--------------------|---|---|-----------------|
| For Reference Only | Package                                 | -<br>For the pricing/inventory/lead time, please contact  | <u></u>         |
|                    |   | us<br>Website: https://www.heisener.com<br>E-mail: salesdept@heisener.com   | Request a Quote |

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### FOLC-140-L2-S-Q-LC-P Specifications

| Manufacturer Part Number          | FOLC-140-L2-S-Q-LC-P  |
|-----------------------------------|---|
| Manufacturer                      | Samtec Inc.   |
| Category                          | Connectors, Interconnects                                     |
|                                   | Rectangular Connectors - Headers, Receptacles, Female Sockets |
| Package                           |   |
| Series                            | FOURRAY? FOLC   |
| Connector Type                    | Receptacle  |
| Contact Type                      | Female Socket   |
| Style                             | Board to Board  |
| Number of Positions               | 160   |
| Number of Positions Loaded        | All   |
| Pitch - Mating                    | 0.050" (1.27mm)   |
| Number of Rows                    | 4   |
|                                   |   |
| Row Spacing - Mating              | 0.050" (1.27mm)   |
| Mounting Type                     | Surface Mount   |
| Termination                       | Solder  |
| Fastening Type                    | Push-Pull   |
| Contact Finish - Mating           | Gold  |
| Contact Finish Thickness - Mating | 30µin (0.76µm)  |
| Insulation Color                  | Black   |
| Insulation Height                 | 0.178" (4.51mm)   |
| Contact Length - Post             | -   |
| Operating Temperature             | -55°C ~ 125°C   |
| Material Flammability Rating      | UL94 V-0  |

| Contact Finish - Post  | Tin                        |
|------------------------|----------------------------|
| Mated Stacking Heights | -                          |
| Ingress Protection     | -                          |
| Features               | Board Lock, Pick and Place |
|                        |                            |

Report errors?

#### FOLC-140-L2-S-Q-LC-P Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## FOLC-140-L2-S-Q-LC-P Payment Methods

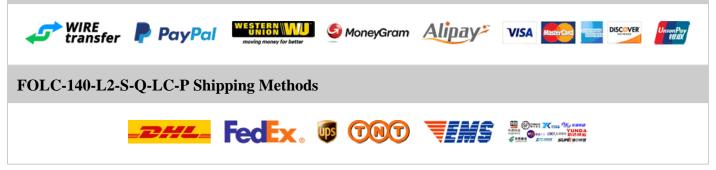

If you have any question about FOLC-140-L2-S-Q-LC-P, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com