


FRCIR020R-24A-25PF80T112-12

FRCIR020R-24A-25PF80T112-12 Information

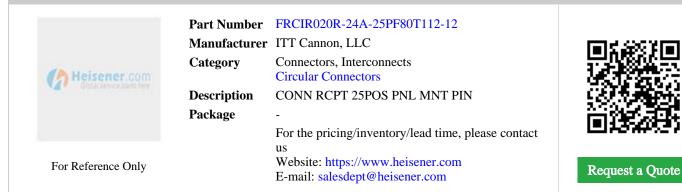

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FRCIR020R-24A-25PF80T112-12 Specifications

Manufacturer Part Number FRCIR020R-24A-25PF80T112-12 Manufacturer ITT Cannon, LLC Category Connectors, Interconnects Package - Package - Series MIL-DTL-5015, CIR Number of Positions 25 Shell Size - Insert 24-A25 Mounting Type Panel Mount, Flange Mounting Type Panel Mount, Flange Termination Crimp Ages Protection Normanne Honoge Muterial, Finish Aluminum Alloy, Olive Drab Cadmium Plated Fortage Facetardant Voltage - Rated StovAC, 250VDC Current Rating 13A		
CategoryConnectors, Interconnects Circular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions25Shell Size - Insert24-A25Mouting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress ProtectionGuidShell Material, FinishGoldContact FinishGoldFaturesFame RetardantVoltage - RatedJaNovic DyDCCurrent RatingJaA	Manufacturer Part Number	FRCIR020R-24A-25PF80T112-12
Circular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions25Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress ProtectionEnvironment ProofShell Material, FinishGoldContact FinishGoldFaturesFlame RetardantVoltage - Rated3A	Manufacturer	ITT Cannon, LLC
Package-SeriesML-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions25Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress ProtectionEnvironmet ProofShell Material, FinishGoldFeaturesFlame RetardantVoltage - Rated300 VAC, 250 VDCCurrent Rating13A	Category	Connectors, Interconnects
SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions25Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishGoldFoaturesFlame RetardantVoltage - RatedJOVAC, 250VDCCurrent Rating13A		Circular Connectors
Connector TypeReceptacle, Male PinsNumber of Positions25Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress ProtectionEnvironment ProofShell Material, FinishGoldFoaturesFlame RetardantVoltage - RatedS0VAC, 250VDCCurrent RatingI3A	Package	-
Number of Positions25Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Series	MIL-DTL-5015, CIR
Shell Size - Insert24-A25Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Connector Type	Receptacle, Male Pins
Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCGurrent Rating13A	Number of Positions	25
Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCGurrent Rating13A	Shell Size - Insert	24-A25
TerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Shell Size, MIL	-
Fastening TypeBayonet LockOrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Mounting Type	Panel Mount, Flange
OrientationN (Normal)Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Termination	Crimp
Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Fastening Type	Bayonet Lock
Shell Material, FinishAluminum Alloy, Olive Drab Cadmium PlatedContact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Orientation	N (Normal)
Contact FinishGoldFeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Ingress Protection	Environment Proof
FeaturesFlame RetardantVoltage - Rated200VAC, 250VDCCurrent Rating13A	Shell Material, Finish	Aluminum Alloy, Olive Drab Cadmium Plated
Voltage - Rated200VAC, 250VDCCurrent Rating13A	Contact Finish	Gold
Current Rating 13A	Features	Flame Retardant
-	Voltage - Rated	200VAC, 250VDC
Report errors?	Current Rating	13A
		Report errors?

FRCIR020R-24A-25PF80T112-12 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about FRCIR020R-24A-25PF80T112-12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com