


FRCIR030-40A-60PF80T108

FRCIR030-40A-60PF80T108 Information

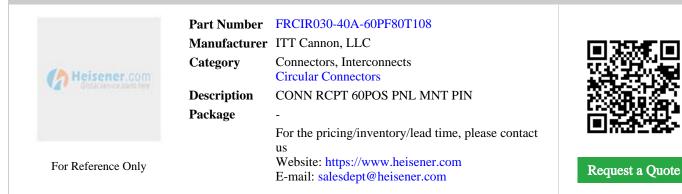

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FRCIR030-40A-60PF80T108 Specifications

Manufacturer Part NumberFRCIR030-40A-60PF80T108ManufacturerCT Canon, LLCCategoryConnectors, InterconnectsCarcular ConnectorsCircular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, FinishSilverFaturesFlame Ratundant, SilverFaturesSilverFaturesSilver, 2000CCurrent RatingSilver, 2000CCurrent RatingSilverStort RaterSilverFaturesS		
CategoryConnectorsCircular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Munting TypePanel Mount, FlangeMounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedForturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Manufacturer Part Number	FRCIR030-40A-60PF80T108
Initial ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedForturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Manufacturer	ITT Cannon, LLC
Package-SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedFeaturesFiame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Category	Connectors, Interconnects
SeriesMIL-DTL-5015, CIRConnector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeMounting TypeCrimpFastening TypeBayonet LockOrientation.Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFame RetardantVoltage - Rated30 VAC, 700 VDCCurrent Rating13A		Circular Connectors
Connector TypeReceptacle, Male PinsNumber of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverFoaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Package	-
Number of Positions60Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Series	MIL-DTL-5015, CIR
Shell Size - Insert40-A60Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Connector Type	Receptacle, Male Pins
Shell Size, MIL-Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Number of Positions	60
Mounting TypePanel Mount, FlangeTerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Size - Insert	40-A60
TerminationCrimpFastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Size, MIL	-
Fastening TypeBayonet LockOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Mounting Type	Panel Mount, Flange
OrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Termination	Crimp
Ingress Protection-Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Fastening Type	Bayonet Lock
Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Orientation	N (Normal)
Contact FinishSilverFeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Ingress Protection	-
FeaturesFlame RetardantVoltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Material, Finish	Aluminum Alloy, Black Zinc Cobalt Plated
Voltage - Rated500VAC, 700VDCCurrent Rating13A	Contact Finish	Silver
Current Rating 13A	Features	Flame Retardant
-	Voltage - Rated	500VAC, 700VDC
Report errors?	Current Rating	13A
		Report errors?

FRCIR030-40A-60PF80T108 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

FRCIR030-40A-60PF80T108 Payment Methods



If you have any question about FRCIR030-40A-60PF80T108, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com