


# FRCIRG06SB28-16PWF80T108-20

#### FRCIRG06SB28-16PWF80T108-20 Information

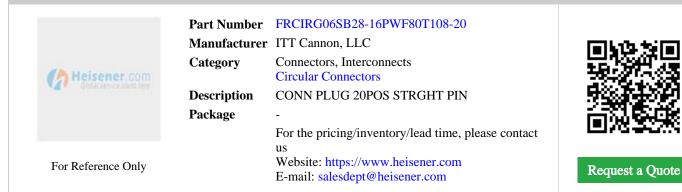

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### FRCIRG06SB28-16PWF80T108-20 Specifications

ManufacturerITT Cannon, LLCCategoryConnectors, Interconnects Circular ConnectorsPackage-Package-SeriesMIL-DTL-5015, CIRConnector TypePlug, Male PinsNumber of Positions20Shell Size - Insert28-16Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionAluminum Alloy, Black Zinc Cobalt PlatedShell Material, FinishSilverFacturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - RatedSOVAC, 700VDC			
CategoryConnectors, Interconnects Circular ConnectorsPackage-PackageMIL-DTL-5015, CIRConnector TypePlug, Male PinsConnector Type20Stell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zine Cobalt PlatedContact FinishSilverFastenerCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated3A	Manufacturer Part Number	FRCIRG06SB28-16PWF80T108-20	
Circular ConnectorsPackage-SeriesMIL-DTL-5015, CIRConnector TypePlug, Male PinsNumber of Positions20Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - RatedI3A	Manufacturer	ITT Cannon, LLC	
Package-SeriesMIL-DTL-5015, CIRConnector TypePlug, Male PinsNumber of Positions20Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)Mounting TypeBayonet LockStell Size, MILWOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedPeaturesGoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated13A	Category	Connectors, Interconnects	
SeriesMIL-DTL-5015, CIRConnector TypePlug, Male PinsNumber of Positions20Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - RatedJ3A		Circular Connectors	
Connector TypePlug, Male PinsNumber of Positions20Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated13A	Package	-	
Number of Positions20Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated13A	Series	MIL-DTL-5015, CIR	
Shell Size - Insert28-16Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated13A	Connector Type	Plug, Male Pins	
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - RatedJ3A	Number of Positions	20	
Mounting TypeFree Hanging (In-Line)TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated30VAC, 700VDCLurrent Rating13A	Shell Size - Insert	28-16	
TerminationCrimpFastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Size, MIL	-	
Fastening TypeBayonet LockOrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Mounting Type	Free Hanging (In-Line)	
OrientationWIngress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Termination	Crimp	
Ingress ProtectionEnvironment ProofShell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Fastening Type	Bayonet Lock	
Shell Material, FinishAluminum Alloy, Black Zinc Cobalt PlatedContact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Orientation	W	
Contact FinishSilverFeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Ingress Protection	Environment Proof	
FeaturesCoupling Nut, Flame Retardant, Shielded, Shrink Boot AdapterVoltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Material, Finish	Aluminum Alloy, Black Zinc Cobalt Plated	
Voltage - Rated500VAC, 700VDCCurrent Rating13A	Contact Finish	Silver	
Current Rating 13A	Features	Coupling Nut, Flame Retardant, Shielded, Shrink Boot Adapter	
-	Voltage - Rated	500VAC, 700VDC	
Report errors?	Current Rating	13A	
			Report errors?

### FRCIRG06SB28-16PWF80T108-20 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about FRCIRG06SB28-16PWF80T108-20, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com