

FRS-R-1/8

FRS-R-1/8 Information

| Containance contains | Part Number Manufacturer Category Description Package | FRS-R-1/8 Eaton Circuit Protection Electrical, Specialty Fuses FUSE TRON DUAL ELEMENT Cartridge, Non-Standard For the pricing/inventory/lead time, please contact | |
|----------------------|---|---|-----------------|
| For Reference Only | | us Website: https://www.heisener.com E-mail: salesdept@heisener.com | Request a Quote |

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



FRS-R-1/8 Specifications

| ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassKS5ApprovalsCCSA, ULOperating Temperature200kA AC, 20kA DCPackage / CaseHolderPackage / CaseCattridge, Non-Standard | | |
|---|-----------------------------------|--|
| CategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCBreaking Capacity @ Rated VoltageHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Manufacturer Part Number | FRS-R-1/8 |
| Electrical, Specialty FusesPackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCBreaking Capacity @ Rated Voltage200kA AC, 20kA DCPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Manufacturer | Eaton |
| PackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCC CSA, ULOperating Type-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Category | Circuit Protection |
| SeriesFuseron? FRS-RFuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | | Electrical, Specialty Fuses |
| Fuse TypeCartridgeCurrent Rating125mAVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Package | Cartridge, Non-Standard |
| Current Rating125mACurrent Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Series | Fusetron? FRS-R |
| Voltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Fuse Type | Cartridge |
| Voltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Current Rating | 125mA |
| Response TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Voltage Rating - AC | 600V |
| ApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Voltage Rating - DC | 300V |
| Features-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Response Time | Slow |
| ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Applications | Electrical, Industrial |
| ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Features | - |
| Operating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Class | RK5 |
| Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Approvals | CE, CSA, UL |
| Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Operating Temperature | - |
| Package / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Breaking Capacity @ Rated Voltage | 200kA AC, 20kA DC |
| Size / Dimension 0.810" Dia x 3.00" L (20.57mm x 76.20mm) | Mounting Type | Holder |
| | Package / Case | Cartridge, Non-Standard |
| Report errors? | Size / Dimension | 0.810" Dia x 3.00" L (20.57mm x 76.20mm) |
| • | | Report errors? |

FRS-R-1/8 Guarantees

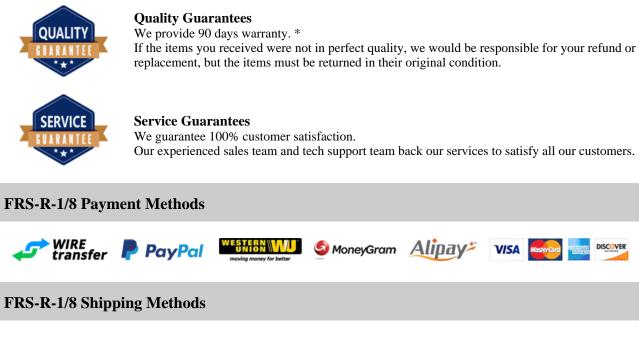



If you have any question about FRS-R-1/8, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com