


FRS-R-15

FRS-R-15 Information

	Part Number	FRS-R-15
	Manufacturer	Eaton
() Heisener.com	Category	Circuit Protection Electrical, Specialty Fuses
A Construction test	Description	FUSE TRON DUAL ELEMENT FUSE CLAS
	Package	Cartridge, Non-Standard
		For the pricing/inventory/lead time, please contact
For Reference Only		us Website: https://www.heisener.com



For Reference Only

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

FRS-R-15 Specifications

ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesCartridge, Non-StandardSeriesFusetron? FRS-RCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200KA AC, 20kA DCManufacturesCartridge, Non-StandardSylex (CaseCartridge, Non-StandardSilow10dlerPackage / CaseCartridge, Non-StandardSilowCartridge, Non-StandardSilowSoloka Acc, 20kA DCPackage / CaseCartridge, Non-StandardSilowCartridge, Non-StandardSilowSolowSilowSolowSilowSoloka Acc, 20kA DCSilowSoloka Acc, 20kA DCSilowSoloka Acc, 20kA DCSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSilowSolowSi		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFatures-ClassKK5ApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCMounting TypeHolderPackage / CaseSator" La (20,57mm x 76.20mm)	Manufacturer Part Number	FRS-R-15
InferencePackageElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature200KA AC, 20KA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Manufacturer	Eaton
PackageCartridge, Non-StandardSeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderStack / ClassCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Category	Circuit Protection
SeriesFusetron? FRS-RFuse TypeCartridgeCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderStack of CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse TypeCartridgeCurrent Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Di x 3.00" L (20.57mm x 76.20mm)	Package	Cartridge, Non-Standard
Current Rating15AVoltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Series	Fusetron? FRS-R
Voltage Rating - AC600VVoltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / Case0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Fuse Type	Cartridge
Voltage Rating - DC300VResponse TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Current Rating	15A
Response TimeSlowApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Voltage Rating - DC	300V
Features-Features-ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Response Time	Slow
ClassRK5ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Class	RK5
Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Approvals	CE, CSA, UL
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Operating Temperature	-
Package / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Breaking Capacity @ Rated Voltage	200kA AC, 20kA DC
Size / Dimension 0.810" Dia x 3.00" L (20.57mm x 76.20mm)	Mounting Type	Holder
	Package / Case	Cartridge, Non-Standard
Report errors?	Size / Dimension	0.810" Dia x 3.00" L (20.57mm x 76.20mm)
		Report errors?

E-mail: salesdept@heisener.com

FRS-R-15 Guarantees

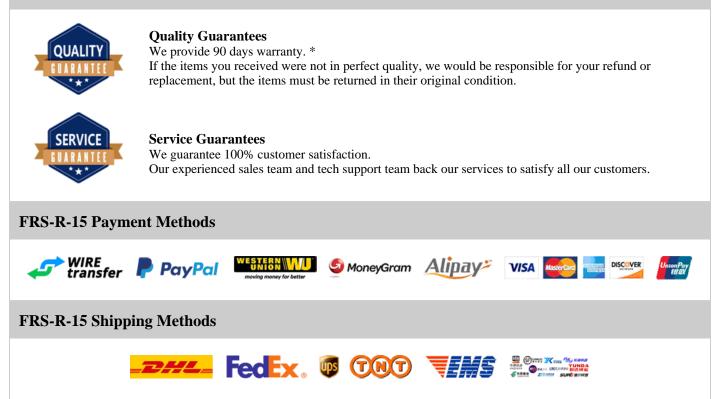

If you have any question about FRS-R-15, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com