


# FS48-750-C2-B

#### FS48-750-C2-B Information

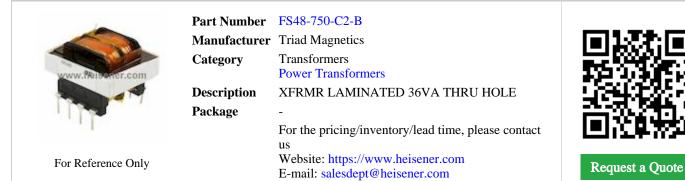

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# FS48-750-C2-B Specifications

Manufacturer Part NumberFS48-750-C2-BManufacturerTriad MagneticsCategoryTransformersPackage-Package-SeriesSplit Pack?, Class 2/3, FSTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 1.5A, Series 48VCurrent - Output (Max)DualSecondary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - MaxThe ALL L
CategoryTransformersPower TransformersPackagePackageSeriesTypeVoltage - PrimaryVoltage - Secondary (Full Load)Primary Winding(s)Primary Winding(s)Secondary Winding(s)Power - MaxNoPower - Max
Power TransformersPackage-SeriesSplit Pack?, Class 2/3, FSTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualPower - Max36 VA
Package-SeriesSplit Pack?, Class 2/3, FSTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
SeriesSplit Pack?, Class 2/3, FSTypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
Voltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
Voltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
Current - Output (Max)Parallel 1.5A, Series 750mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max36 VA
Secondary Winding(s)DualCenter TapNoPower - Max36 VA
Center TapNoPower - Max36 VA
Power - Max 36 VA
Mounting Type Through Hole
Termination Style PC Pin
Size / Dimension66.68mm L x 55.55mm W
Height - Seated (Max) 39.67mm
Voltage - Isolation 4200Vrms
Weight 1.1 lbs (499g)
Report error

#### FS48-750-C2-B Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### FS48-750-C2-B Payment Methods



## FS48-750-C2-B Shipping Methods



If you have any question about FS48-750-C2-B, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com