


G5PA-1-M DC5 BY OMZ (PF) Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

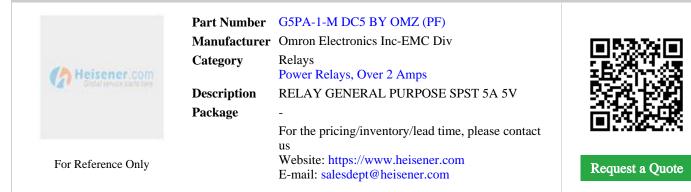

G5PA-1-M DC5 BY OMZ (PF) Specifications

Manufacturer Omron Electronics Inc-EMC Div Category Relays Power Relays, Over 2 Amps Power Relays, Over 2 Amps Package - Series G5PA-1 Relay Type General Purpose Coil Type Non Latching Coil Current 108mA Coil Voltage SVDC Contact Form SPST-NO (1 Form A) Contact Rating (Current) SA Switching Voltage 277VAC, 30VDC - Max Turn On Voltage (Max) 4 VDC Operate Time 5ms Release Time Sms Features Sealed - Flux Protection		
CategoryRelaysPackage-Package-SeriesG5PA-1Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current108mACoil VoltageSVDCContact FormSYST-NO (1 Form A)Contact Rating (Current)SASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Man)0.5 VDCQuera Time5msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Manufacturer Part Number	G5PA-1-M DC5 BY OMZ (PF)
Power Relays, Over 2 AmpsPackage-SeriesG5PA-1Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current108mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease TimeSealed - Flux ProtectionFeaturesSealed - Flux ProtectionMounting TypePC Pin	Manufacturer	Omron Electronics Inc-EMC Div
Package-SeriesG5PA-1Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current108mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)0.5 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease TimeSmsFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Category	Relays
SeriesG5PA-1Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current108mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)0.5 VDCOperate Time15msRelease TimeSmsFeaturesSealed - Flux ProtectionMounting TypePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current108mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)SASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)0.5 VDCOperate Time15msRelease TimeSmaleFeaturesSaled - Flux ProtectionMounting TypeChing HoleTermination StylePC Pin	Package	-
Coil TypeNon LatchingCoil Yupe108mACoil Current5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease TimeSmaleFeaturesSeled - Flux ProtectionMounting TypeChoing HoleTermination StylePC Pin	Series	G5PA-1
Coil Current108mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage (Max)277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HolePromination StylePC Pin	Relay Type	General Purpose
Coil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease TimesSealed - Flux ProtectionMounting TypeThrough HolePermination StylePC Pin	Coil Type	Non Latching
Contact FormSPST-NO (1 Form A)Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HolePC PinPC Pin	Coil Current	108mA
Contact Rating (Current)5ASwitching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HolePermination StylePC Pin	Coil Voltage	5VDC
Switching Voltage277VAC, 30VDC - MaxTurn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPST-NO (1 Form A)
Turn On Voltage (Max)4 VDCTurn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	5A
Turn Off Voltage (Min)0.5 VDCOperate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	277VAC, 30VDC - Max
Operate Time15msRelease Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	4 VDC
Release Time5msFeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	0.5 VDC
FeaturesSealed - Flux ProtectionMounting TypeThrough HoleTermination StylePC Pin	Operate Time	15ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	Sealed - Flux Protection
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

G5PA-1-M DC5 BY OMZ (PF) Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about G5PA-1-M DC5 BY OMZ (PF), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com