


# G6A-434P-ST-US-DC6

#### **G6A-434P-ST-US-DC6 Information**

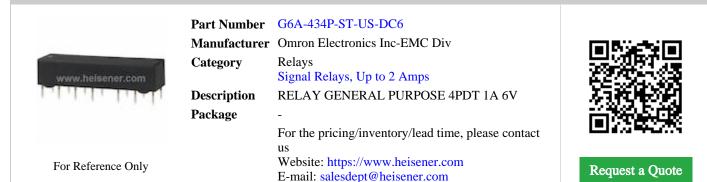

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## G6A-434P-ST-US-DC6 Specifications

Manufacturer Part NumberG6A-434P-ST-US-DC6ManufacturerOmron Electronics Inc-EMC DivCategoryRelaysCategorySignal Relays, Up to 2 AmpsPackage-SeriesG6ARelay TypeGeneral PurposeCoil TypeMon LachingCoil Current60MACoil Current60MAContact Form4DT (4 Form C)Contact Rating (Current)JACSwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Of Voltage (Max)SinsRelease TimeSinsFeatures-Mouning TypeCincing HoleFeaturesPC Pin		
CategoryRelaysCategorySignal Relays, Up to 2 AmpsPackage-SeriesG6ARelay TypeGeneral PurposeColl TypeMon LatchingColl Current60mAColl Current60mAContact Form4DT (4 Form C)Contact Rating (Current)JASwitching Yoltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCCurrent (Max)5.0 NGCurrent (Max)6.0 NGStricting Current)1.0 NGStricting Current)5.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)5.0 NGCurrent (Max)6.0 NGCurrent (Max)1.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)5.0 NGCurrent (Max)5.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)6.0 NGCurrent (Max)7.0 NGCurrent (	Manufacturer Part Number	G6A-434P-ST-US-DC6
Signal Relays, Up to 2 AmpsPackage-SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current60mAColi Qurent6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination Style9C Pin	Manufacturer	Omron Electronics Inc-EMC Div
Package-SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current60mACoil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCQuerte Time0.6 VDCRelease Time5msFeatures-Mounting TypePC PinTermination StylePC Pin	Category	Relays
SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current60mACoil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypePC Pin		Signal Relays, Up to 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current60mACoil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)0.6 VDCTurn Off Voltage (Min)0.6 VDCOperate Time5msRelease Time-Mounting TypePC PinTermination StylePC Pin	Package	-
Coil TypeNon LatchingCoil Current60mACoil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time5msFeatures-Mounting Type0.7 Inough HoleTermination StylePC Pin	Series	G6A
Coil Current60mACoil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination Style9C Pin	Relay Type	General Purpose
Coil Voltage6VDCContact Form4PDT (4 Form C)Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Coil Type	Non Latching
Contact Form4PDT (4 Form C)Contact Form1ASwitching (Current)250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HolePremination StylePC Pin	Coil Current	60mA
Contact Rating (Current)1ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Coil Voltage	6VDC
Switching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Form	4PDT (4 Form C)
Turn On Voltage (Max)4.2 VDCTurn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Rating (Current)	1A
Turn Off Voltage (Min)0.6 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 220VDC - Max
Operate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	4.2 VDC
Release Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	0.6 VDC
Features-Mounting TypeThrough HoleTermination StylePC Pin	Operate Time	7ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	-
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

### G6A-434P-ST-US-DC6 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

### G6A-434P-ST-US-DC6 Payment Methods





If you have any question about G6A-434P-ST-US-DC6, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com