


G6A-474P-ST40-US-DC12 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

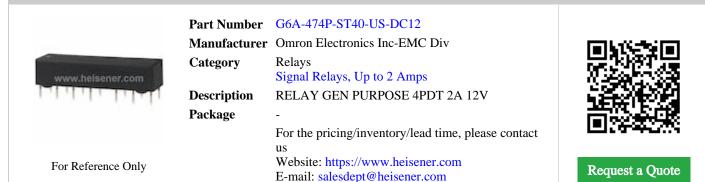

G6A-474P-ST40-US-DC12 Specifications

Manufacturer Part Number G6A-474P-ST40-US-DC12 Manufacturer Omron Electronics Inc-EMC Div Category Relays Category Relays Package - Series G6A Relay Type General Purpose Coil Type Non Latching Coil Current 33.3mA Coil Current JavDC Cotact Form 4PDT (4 Form C) Cotact Rating (Current) 2A Switching Voltage SoVAC, 220VDC - Max Turn On Voltage (Max) 8.4 VDC Querta Time Sms Release Time Sms Features - Features Prinoigh Hole Parcenting Type Chrongh Hole		
CategoryRelaysCategorySignal Relays, Up to 2 AmpsPackage-SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact Form2AContact Rating (Current)2ASwitching Yoltage20VAC, 220VDC - MaxTurn On Voltage (Max)1.2 VDCCurrent9.1 CSeries Time5.1 CCurrentSinsRelease Time-Features-Mounting Type-Fentination StyleDC NaStrict StyleSinsStrict StyleSinsStrict Style-Strict StyleSinsStrict Styl	Manufacturer Part Number	G6A-474P-ST40-US-DC12
Signal Relays, Up to 2 AmpsPackage-SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination Style9C Pin	Manufacturer	Omron Electronics Inc-EMC Div
Package-SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current3.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage50VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCCurrent fine1.2 VDCRelease Time5msFeaturesSinsFeatures-Mounting TypePice HoleFernination StyleCinage HolePernination StyleCinage HoleContact StyleCinage HoleContact StyleSinsContact StyleCinage HoleContact	Category	Relays
SeriesG6ARelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypePC Pin		Signal Relays, Up to 2 Amps
Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current33.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time5msRelease Time5msFeatures-Mounting TypePC Pin	Package	-
Coil TypeNon LatchingCoil Type33.3mACoil Outrent33.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time5msFeatures-Mounting TypeThrough HolePerinnation StylePC Pin	Series	G6A
Coil Current33.3mACoil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination Style9C Pin	Relay Type	General Purpose
Coil Voltage12VDCContact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Coil Type	Non Latching
Contact Form4PDT (4 Form C)Contact Rating (Current)2ASwitching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HolePC PinPC Pin	Coil Current	33.3mA
Contact Rating (Current)2ASwitching Voltage50VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Coil Voltage	12VDC
Switching Voltage250VAC, 220VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Form	4PDT (4 Form C)
Turn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Rating (Current)	2A
Turn Off Voltage (Min)1.2 VDCOperate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 220VDC - Max
Operate Time7msRelease Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	8.4 VDC
Release Time5msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	1.2 VDC
Features-Mounting TypeThrough HoleTermination StylePC Pin	Operate Time	7ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	5ms
Termination Style PC Pin	Features	-
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

G6A-474P-ST40-US-DC12 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

G6A-474P-ST40-US-DC12 Payment Methods



If you have any question about G6A-474P-ST40-US-DC12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com