


# G6B-2114P-US DC6

## **G6B-2114P-US DC6 Information**

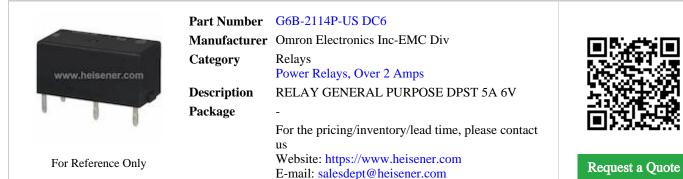

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# **G6B-2114P-US DC6 Specifications**

| Manufacturer Part NumberGGB-2114P-US DC6ManufacturerOmron Electronics Inc-EMC DivCategoryRelaysPower Relays, Over 2 AmpsPower Relays, Over 2 AmpsPackage-SeriesGGBRelay TypeGeneral PurposeCoil TypeNon LatchingCoil CurrentSomAContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)SASwitching Voltage380VAC, 125VDC - MaxTurn Off Voltage (Man)0.6 VDCTurn Off Voltage (Min)0.6 VDCRelease Time10ms |               |
|--|---------------|
| CategoryRelaysCategoryPower Relays, Over 2 AmpsPackage-SeriesG6BRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10ms  |               |
| PackagePower Relays, Over 2 AmpsPackage-SeriesG6BRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10ms   |               |
| Package-SeriesG6BRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10ms   |               |
| SeriesG6BRelay TypeGeneral PurposeCoil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms   |               |
| Relay TypeGeneral PurposeCoil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10ms  |               |
| Coil TypeNon LatchingCoil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms   |               |
| Coil Current50mACoil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms  |               |
| Coil Voltage6VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms  |               |
| Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms  |               |
| Contact Rating (Current)5ASwitching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms   |               |
| Switching Voltage380VAC, 125VDC - MaxTurn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms   |               |
| Turn On Voltage (Max)4.8 VDCTurn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms  |               |
| Turn Off Voltage (Min)0.6 VDCOperate Time10msRelease Time10ms  |               |
| Operate Time10msRelease Time10ms   |               |
| Release Time 10ms  |               |
|  |               |
|  |               |
| Features Sealed - Fully  |               |
| Mounting Type Through Hole   |               |
| Termination Style PC Pin   |               |
| Re   | eport errors? |

#### G6B-2114P-US DC6 Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### G6B-2114P-US DC6 Payment Methods



### **G6B-2114P-US DC6 Shipping Methods**



If you have any question about G6B-2114P-US DC6, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com