


G6CK-2114P-US-DC12

G6CK-2114P-US-DC12 Information

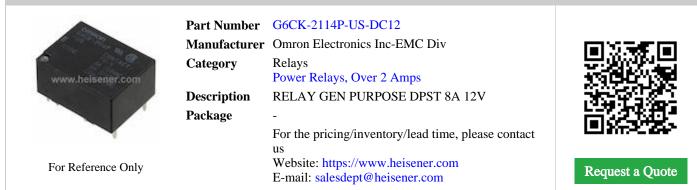

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



G6CK-2114P-US-DC12 Specifications

Manufacturer Part Number G6CK-2114P-US-DC12 Manufacturer Omron Electronics Inc-EMC Div Category Relays Package Power Relays, Over 2 Amps Package - Series G6C Relay Type General Purpose Coil Type Latching, Dual Coil Coil Current 23.3mA Coil Voltage IVDC Contact Form DPST-NO/NC (1 Form A and B) Contact Rating (Current) 8A Switching Voltage (Max) SOVAC, 125VDC - Max Turn On Voltage (Max) 4.4 VDC Querta Time Ioms Release Time Ioms Release Time Kaled - Fully Mounting Type Chrongh Hole Factures Sealed - Fully		
CategoryRelaysPackage-Package-SeriesG6CRelay TypeGeneral PurposeCoil TypeLaching, Dual CoilCoil Current23.3mACoil VoltageIVDCContact FormDST-NO/NC (1 Form A and B)Contact Rating (Current)84Switching Voltage20VAC, 125VDC - MaxTurn ON Voltage (Max)-Corrent FineImsRelease TimeImsRelease TimeSeled - FullyMounting TypeFrongh HoleFernination StylePC Fun	Manufacturer Part Number	G6CK-2114P-US-DC12
Power Relays, Over 2 AmpsPackage-SeriesG6CRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current23.3mACold Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)-Qperate Time10msRelease TimeIomsFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Omron Electronics Inc-EMC Div
Package-SeriesG6CRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Current23.3mACoil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeIomsFeaturesSealed - FullyMounting TypePC Pin	Category	Relays
SeriesG6CRelay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent23.3mACoil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time5aled - FullyFeaturesSaled - FullyMounting TypePC Pin		Power Relays, Over 2 Amps
Relay TypeGeneral PurposeCoil TypeLatching, Dual CoilCoil Qurrent23.3mACoil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage (Max)50VAC, 125VDC - MaxTurn On Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypePC Pin	Package	-
Coil TypeLatching, Dual CoilCoil Ourent3.3mACoil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSaidel FullyMounting TypePC PinTermination StylePC Pin	Series	G6C
Coil Current23.3mACoil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease TimeSaled - FullyFeaturesScaled - FullyMounting TypePC Pin	Relay Type	General Purpose
Coil Voltage12VDCContact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSaled - FullyMounting TypeThrough HoleTermination StylePC Pin	Coil Type	Latching, Dual Coil
Contact FormDPST-NO/NC (1 Form A and B)Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleYernination StylePC Pin	Coil Current	23.3mA
Contact Rating (Current)8ASwitching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Coil Voltage	12VDC
Switching Voltage250VAC, 125VDC - MaxTurn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Form	DPST-NO/NC (1 Form A and B)
Turn On Voltage (Max)8.4 VDCTurn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	8A
Turn Off Voltage (Min)-Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	250VAC, 125VDC - Max
Operate Time10msRelease Time10msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	8.4 VDC
Release Time10msFeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	-
FeaturesSealed - FullyMounting TypeThrough HoleTermination StylePC Pin	Operate Time	10ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	10ms
Termination Style PC Pin	Features	Sealed - Fully
	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

G6CK-2114P-US-DC12 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

S MoneyGram Alipay VISA

DISCOVER

G6CK-2114P-US-DC12 Payment Methods



G6CK-2114P-US-DC12 Shipping Methods



If you have any question about G6CK-2114P-US-DC12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com

N J