


GA.110.101111

GA.110.101111 Information

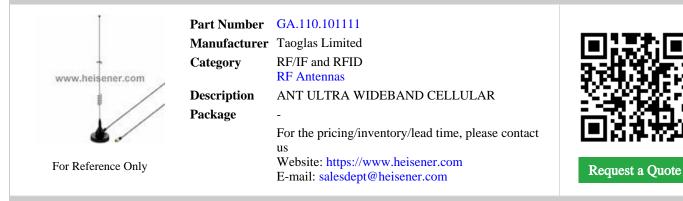

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



GA.110.101111 Specifications

| ManufacturerTaoglas LimitedRar/IF and RFIDRF/A ntennasPackage-Series-Series-Frequency GroupWide BandFrequency (Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | - | |
|---|--------------------------|--|
| CategoryFrRF AntennasPackage-Series-Frequency GroupWide BandFrequency (Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Height (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Manufacturer Part Number | GA.110.101111 |
| ConstructionRF AntennasPackage-Series-Frequency GroupWide BandFrequency (Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)1.3012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Manufacturer | Taoglas Limited |
| Package-Series-Frequency GroupWide BandFrequency Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-IterminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)1.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPSN, MSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Category | RF/IF and RFID |
| Series - Frequency Group Wide Band Frequency (Center/Band) 750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2.GHz, 3.5GHz Frequency Range 698MHz ~ 3.5GHz Antenna Type Whip, Straight Number of Bands 8 VSWR - Return Loss - Gain 1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBi Power - Max 50W Features - Termination Cable (1M) - SMA Male Ingress Protection - Mounting Type Magnetic Height (Max) 13.012" (330.50mm) Applications CDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | | RF Antennas |
| Frequency GroupWide BandFrequency (Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)3.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Package | - |
| Frequency (Center/Band)750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHzFrequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)1.3.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Series | - |
| Frequency Range698MHz ~ 3.5GHzAntenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Frequency Group | Wide Band |
| Antenna TypeWhip, StraightNumber of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Frequency (Center/Band) | 750MHz, 892MHz, 1.575GHz, 1.8GHz, 1.9GHz, 2GHz, 2.5GHz, 3.5GHz |
| Number of Bands8VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Frequency Range | 698MHz ~ 3.5GHz |
| VSWR-Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WPower - Max-Features-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Antenna Type | Whip, Straight |
| Return Loss-Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-Features-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)1.3012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Number of Bands | 8 |
| Gain1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBiPower - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | VSWR | - |
| Power - Max50WFeatures-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Return Loss | - |
| Features-TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Gain | 1.8dBi, 2.6dBi, 1.3dBi, 2.5dBi, 2.3dBi, 3.9dBi, 2.9dBi, 0.6dBi |
| TerminationCable (1M) - SMA MaleIngress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Power - Max | 50W |
| Ingress Protection-Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GSSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Features | - |
| Mounting TypeMagneticHeight (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Termination | Cable (1M) - SMA Male |
| Height (Max)13.012" (330.50mm)ApplicationsCDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Ingress Protection | - |
| Applications CDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi | Mounting Type | Magnetic |
| | Height (Max) | 13.012" (330.50mm) |
| Report errors? | Applications | CDMA, EDGE, DCS, GPRS, GPS, GSM, HSDPA, LTE, PCS, UMTS, WCDMA, Wi-Fi |
| | | Report errors? |

GA.110.101111 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

GA.110.101111 Payment Methods



GA.110.101111 Shipping Methods



If you have any question about GA.110.101111, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com