

GTC10DABN-M30

GTC10DABN-M30 Information



E-mail: salesdept@heisener.com

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



GTC10DABN-M30 Specifications

Manufacturer Part Number	GTC10DABN-M30
Manufacturer	Sullins Connector Solutions
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Male Pins
Package	-
Series	-
Connector Type	Header
Contact Type	Male Pin
Pitch - Mating	0.100" (2.54mm)
Style	Board to Board or Cable
Shrouding	Unshrouded
Number of Positions	20
Number of Positions Loaded	All
Number of Rows	2
Row Spacing - Mating	0.100" (2.54mm)
Mounting Type	Surface Mount
Termination	Solder
Fastening Type	Push-Pull
Contact Length - Mating	0.230" (5.84mm)
Contact Length - Post	-
Overall Contact Length	-
Insulation Height	0.100" (2.54mm)
Contact Shape	Square
Contact Finish - Mating	Tin-Lead

Contact Finish Thickness - Mating	100µin (2.54µm)
Contact Finish - Post	Tin-Lead
Contact Material	Phosphor Bronze
Insulation Material	Polyamide (PA9T), Nylon 9T
Features	-
Operating Temperature	-65°C ~ 125°C
Ingress Protection	-
Material Flammability Rating	UL94 V-0
Insulation Color	Black
	Report errors?

GTC10DABN-M30 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

GTC10DABN-M30 Payment Methods

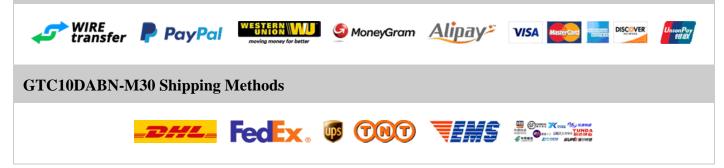

If you have any question about GTC10DABN-M30, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com