


# GTC32DABN-M30

#### **GTC32DABN-M30 Information**

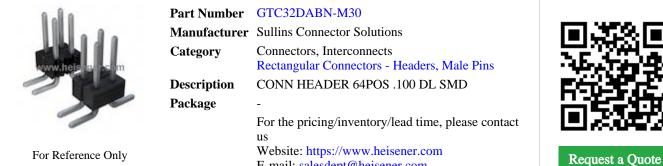

E-mail: salesdept@heisener.com

#### For Reference Only

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **GTC32DABN-M30** Specifications

Manufacturer Part Number	GTC32DABN-M30
Manufacturer	Sullins Connector Solutions
Category	Connectors, Interconnects
	Rectangular Connectors - Headers, Male Pins
Package	-
Series	-
Connector Type	Header
Contact Type	Male Pin
Pitch - Mating	0.100" (2.54mm)
Style	Board to Board or Cable
Shrouding	Unshrouded
Number of Positions	64
Number of Positions Loaded	All
Number of Rows	2
Row Spacing - Mating	0.100" (2.54mm)
Mounting Type	Surface Mount
Termination	Solder
Fastening Type	Push-Pull
Contact Length - Mating	0.230" (5.84mm)
Contact Length - Post	-
Overall Contact Length	-
Insulation Height	0.100" (2.54mm)
Contact Shape	Square
Contact Finish - Mating	Tin-Lead

Contact Finish Thickness - Mating	100µin (2.54µm)
Contact Finish - Post	Tin-Lead
Contact Material	Phosphor Bronze
Insulation Material	Polyamide (PA9T), Nylon 9T
Features	-
Operating Temperature	-65°C ~ 125°C
Ingress Protection	-
Material Flammability Rating	UL94 V-0
Insulation Color	Black
	Report errors?

## GTC32DABN-M30 Guarantees



**Quality Guarantees** 


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### GTC32DABN-M30 Payment Methods

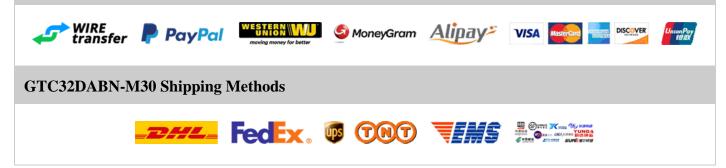

If you have any question about GTC32DABN-M30, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com