

HCC36DRTS-S93

lest a Quote

HCC36DRTS-S93 Information

Heisener.com	Part Number	HCC36DRTS-S93	
	Manufacturer	Sullins Connector Solutions	
	Category	Connectors, Interconnects Card Edge Connectors - Edgeboard Connectors	
	Description	CONN EDGE DUAL FMALE 72POS 0.100	
	Package	-	
		For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



HCC36DRTS-S93 Specifications

Manufacturer Part Number HCC36DRTS-S93 Manufacturer Sullins Connector Solutions Category Connectors, Interconnects Card Edge Connectors - Edgeboard Connectors Card Edge Connectors - Edgeboard Connectors Package - Series - Gender Non Specified - Dual Edge Mumber of Positions/Bay/Row S6 Number of Positions/Bay/Row 36 Number of Positions 72 Card Thickness 0.903° (2.36mm) Number of Rows 2 Pitch 0.100° (2.54mm) Number of Rows 0.100° (2.54mm) Features - Mounting Type Solder Contact Material Solder Contact Material Solder Contact Finish Gold O.60µm) Contact Finish Thickness Soly (0.6µm) Contact Type Blue Bellows Color Bu Farener Side Mount Opening, Unthreaded, 0.125° (3.18mm) Dia Operating Temperature Side You Color	_		
CategoryConnectors, InterconnectsCard Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row36Number of Positions2Card Thickness0.093° (2.36mm)Number of Rows2Pitch0.100° (2.54mm)Features-Mounting Type50 derContact MaterialSolderContact FinishGoldContact Finish Thickness0.001 (0.76µm)Contact TypeFull BellowsContact TypeSile Sile Sile Sile Sile Sile Sile Sile	Manufacturer Part Number	HCC36DRTS-S93	
ActiveCard Edge Connectors - Edgeboard ConnectorsPackage-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row36Number of Positions72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleContact MaterialSolderContact Finish Thickness30juin (0.76µm)Contact Finish Thickness30juin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Manufacturer	Sullins Connector Solutions	
Package-Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row36Number of Positions72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleContact MaterialSolderContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Category	Connectors, Interconnects	
Series-Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row36Number of Positions/Bay/Row72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleContact MaterialSolderContact Finish Thickness30µin (0.76µm)Contact Finish ThicknessSoldurContact TypeFull BellowsColorBueFaquereSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C		Card Edge Connectors - Edgeboard Connectors	
Card TypeNon Specified - Dual EdgeGenderFemaleNumber of Positions/Bay/Row36Number of Positions72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleContact MaterialSolderContact Finish ThicknessGoldContact Finish ThicknessSipin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOpenating TemperatureSide Yan 20°C	Package	-	
GenderFemaleNumber of Positions/Bay/Row36Number of Positions72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleContact MaterialSolderContact FinishGoldContact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-55°C ~ 125°C	Series	-	
Number of Positions/Bay/Row36Number of Positions72Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting Type0.100" (2.54mm)TerminationSolderContact MaterialBeryllium CopperContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-55°C ~ 125°C	Card Type	Non Specified - Dual Edge	
Number of Positions 72 Card Thickness 0.093" (2.36mm) Number of Rows 2 Pitch 0.100" (2.54mm) Features - Mounting Type Through Hole Young Addresi Solder Contact Material Gold Contact Finish Gold Contact Type Full Bellows Color Bue Flange Feature Side Mount Opening, Unthreaded, 0.125" (3.18mm) Dia Operating Temperature -65°C ~ 125°C	Gender	Female	
Card Thickness0.093" (2.36mm)Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Number of Positions/Bay/Row	36	
Number of Rows2Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Number of Positions	72	
Pitch0.100" (2.54mm)Features-Mounting TypeThrough HoleTerminationSolderContact MaterialBeryllium CopperContact Finish ThicknessGoldContact Finish ThicknessSoljun (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Card Thickness	0.093" (2.36mm)	
Features-Mounting TypeThrough HoleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFul BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Number of Rows	2	
Mounting TypeThrough HoleTerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Pitch	0.100" (2.54mm)	
TerminationSolderContact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Features	-	
Contact MaterialBeryllium CopperContact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Mounting Type	Through Hole	
Contact FinishGoldContact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Termination	Solder	
Contact Finish Thickness30µin (0.76µm)Contact TypeFull BellowsColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Contact Material	Beryllium Copper	
Contact TypeFull BellowsColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Contact Finish	Gold	
ColorBlueFlange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Contact Finish Thickness	30µin (0.76µm)	
Flange FeatureSide Mount Opening, Unthreaded, 0.125" (3.18mm) DiaOperating Temperature-65°C ~ 125°C	Contact Type	Full Bellows	
Operating Temperature $-65^{\circ}C \sim 125^{\circ}C$	Color	Blue	
	Flange Feature	Side Mount Opening, Unthreaded, 0.125" (3.18mm) Dia	
Report errors?	Operating Temperature	$-65^{\circ}\mathrm{C} \sim 125^{\circ}\mathrm{C}$	
		Report errors?	

HCC36DRTS-S93 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

HCC36DRTS-S93 Payment Methods

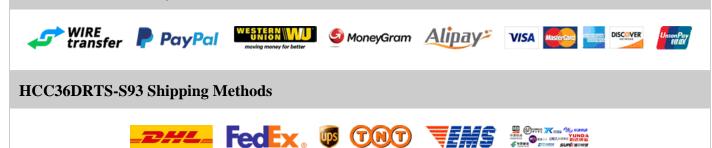

If you have any question about HCC36DRTS-S93, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com