

IF-24-12 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



IF-24-12 Specifications

Manufacturer Part Number IF-24-12 Manufacturer Signal Transformers Category Transformers Package - Series IF Type Semi-Toroidal Voltage - Primary IstV, 230V Voltage - Secondary (Full Load) Parallel 6V, Series 12V Current - Output (Max) Parallel 4A, Series 2A Primary Winding(s) Dual Secondary Winding(s) Dual Power - Max 24 VA Mounting Type Prinorgh Hole Termination Style Secondaru Winding(s) Size / Dimension 68.00mm L x 57.50mm W Voltage - Isolation Youtper Secondaru Winding Secondary (Full Load)		
CategoryTansformersPackage-SeriesIFTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCurter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension68.00mm Lx 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 bis (7.7kg)	Manufacturer Part Number	IF-24-12
ImpersonancePackage-SeriesIFTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleSize / Dimension68.00mm Lx 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Manufacturer	Signal Transformer
Package-SeriesIFTypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StyleSecondary MinickSize / DimensionSi.00mm Lx 57.50mm WHeight - Seated (Max)31.30mmWotage - IsolationMoovrmsWeightThos (7.5g)	Category	Transformers
SeriesIFTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StyleSecondary Minding(s)Size / Dimension68.00mn L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation400VrmsWeightTorlos (7.5g)		Power Transformers
TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypePrinagh HoleStez / Dimension68.00mm L x 57.50mm WSize / Dimension31.30mmVoltage - Isolation4000VrmsWeightStr.7Kg)	Package	-
Voltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StyleSecondary Winding(s)Size / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmWoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Series	IF
Voltage - Secondary (Full Load)Parallel 6V, Series 12VCurrent - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Туре	Semi-Toroidal
Current - Output (Max)Parallel 4A, Series 2APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Voltage - Secondary (Full Load)	Parallel 6V, Series 12V
Secondary Winding(s)DualCenter TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Current - Output (Max)	Parallel 4A, Series 2A
Center TapNoPower - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Primary Winding(s)	Dual
Power - Max24 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Center Tap	No
Termination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Power - Max	24 VA
Size / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Mounting Type	Through Hole
Height - Seated (Max)31.30mmVoltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Termination Style	PC Pin
Voltage - Isolation4000VrmsWeight17 lbs (7.7kg)	Size / Dimension	68.00mm L x 57.50mm W
Weight 17 lbs (7.7kg)	Height - Seated (Max)	31.30mm
	Voltage - Isolation	4000Vrms
Report errors?	Weight	17 lbs (7.7kg)
		Report errors?

IF-24-12 Guarantees

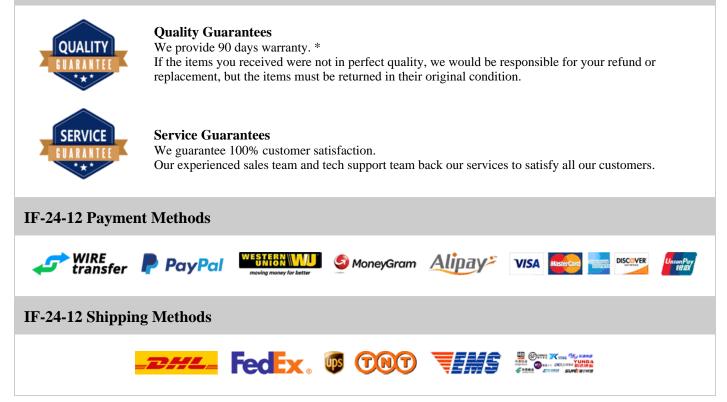

If you have any question about IF-24-12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com