

IF-30-24

IF-30-24 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



IF-30-24 Specifications

Manufacturer Part NumberIF-30-24ManufacturerSignal TransformersCategoryTransformersPower TransformersPower TransformersPackage-SeriesIFTypeSemi-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualPower - Max30 VAMounting TypeFrongh HoleTermination StyleSconmun KSize / Dinension68.00mm L x 57.50mm WVoltage - Isolation310VrmsWeightScolationMounting TypeScolationSize / DinensionScolotionManufacture (Max)ScolotionStart (Max)ScolotionStart (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionStart (Max)ScolotionStart (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManutic (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)ScolotionManufacture (Max)Scolotion <th>_</th> <th></th>	_	
CategoryTansformersPower TransformersPackage-SeriesIFTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeFrinough HoleSize / Dimension68.00mm L x 57.50mm WSize / Dimension35.30mmVoltage - Isolation4000VrmsWeightSul So (9.1kg)	Manufacturer Part Number	IF-30-24
IdentifyPower TransformersPackage-SeriesIFTypeSeni-ToroidalVoltage PrimarySeni-ToroidalVoltage Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)JualCenter TapNoPower Max30 VANounding TypeSecondary Use 1.25APrimation StyleProget MathematicationSize / DimensionSecondary Second Secon	Manufacturer	Signal Transformer
Package.SeriesIFTypeSeni-ToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeFinough HoleSter / DimensionSecondaru ManagementSize / DimensionSecondaru ManagementHeight - Seated (Max)Siz 30mmWoltage - IsolationMovernsaWeightSinse (Secondaru)	Category	Transformers
SeriesIFTypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination StyleSecondary Minding(s)Size / DimensionSecondary Minding(s)Height - Seated (Max)Siz30mmWoltage - IsolationSiz00VrmsWeightOutpresconderse		Power Transformers
TypeSemi-ToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeFrinough HoleSteiz / Dimension68.00mm L x 57.50mm WSize / Dimension53.30mmHeight - Seated (Max)30 VAWeight010 VSteige - Isolation68.00mm L x 57.50mm WSteige - Isolation30.00mm SectionSteige - Seated (Max)30.00mm SectionSteige - Seated (Max)30.00mm SectionSteige - Seated (Max)30.00mm SectionSteight - Seated (Max)30.00mm Section <t< td=""><td>Package</td><td>-</td></t<>	Package	-
A115V, 230VVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination StyleSecondary LogingSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeightSo the Secondary Management	Series	IF
Voltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Туре	Semi-Toroidal
Current - Output (Max)Parallel 2.5A, Series 1.25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeightSub (9.1kg)	Voltage - Secondary (Full Load)	Parallel 12V, Series 24V
Secondary Winding(s)DualCenter TapNoPower - Max30 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Current - Output (Max)	Parallel 2.5A, Series 1.25A
Center TapNoPower - Max30 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Primary Winding(s)	Dual
Power - Max30 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Center Tap	No
Termination StylePC PinSize / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Power - Max	30 VA
Size / Dimension68.00mm L x 57.50mm WHeight - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Mounting Type	Through Hole
Height - Seated (Max)35.30mmVoltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Termination Style	PC Pin
Voltage - Isolation4000VrmsWeight20 lbs (9.1kg)	Size / Dimension	68.00mm L x 57.50mm W
Weight 20 lbs (9.1kg)	Height - Seated (Max)	35.30mm
	Voltage - Isolation	4000Vrms
Report errors?	Weight	20 lbs (9.1kg)
		Report errors?

IF-30-24 Guarantees

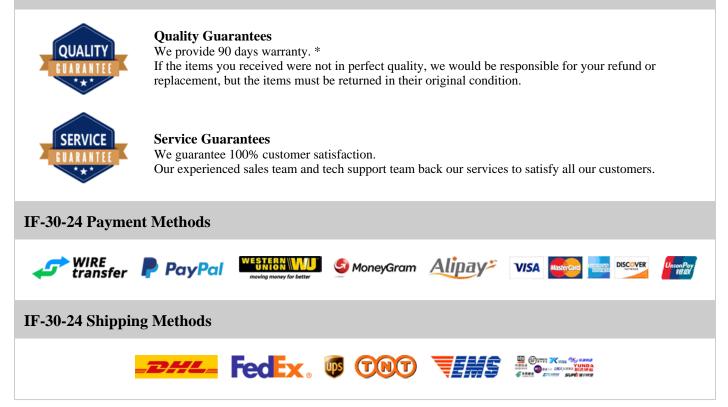

If you have any question about IF-30-24, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com