


ISL32450EIUZ-T7A

ISL32450EIUZ-T7A Information

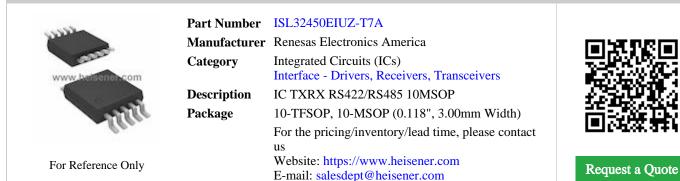

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ISL32450EIUZ-T7A Specifications

Manufacturer Renesas Electronics America Category Integrated Circuits (ICs) Interface - Drivers, Receivers, Transceivers Package 10-TFSOP, 10-MSOP (0.118", 3.00mm Width) Series - Type Transceiver Protocol Rs422, RS485 Number of Drivers/Receivers 1/1 Duplex Full Receiver Hysteresis 30mV Data Rate 250kbps Voltage - Supply 3 V ~ 5.5 V Operating Temperature 40°C ~ 85°C Mounting Type Surface Mount Package / Case 10-TFSOP, 10-MSOP (0.118", 3.00mm Width)		
CategoryIntegrated Circuits (ICs) Interface - Drivers, Receivers, TransceiversPackage10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Series-TypeTransceiverTypeTransceiverProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Manufacturer Part Number	ISL32450EIUZ-T7A
Interface - Drivers, Receivers, TransceiversPackage10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Series-TypeTransceiverProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Manufacturer	Renesas Electronics America
Package10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Series-TypeTransceiverTypeTransceiverProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)	Category	Integrated Circuits (ICs)
Series-TypeTransceiverProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)		Interface - Drivers, Receivers, Transceivers
TypeTransceiverProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Package	10-TFSOP, 10-MSOP (0.118", 3.00mm Width)
ProtocolRS422, RS485Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Series	-
Number of Drivers/Receivers1/1DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Туре	Transceiver
DuplexFullReceiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Protocol	RS422, RS485
A receiver Hysteresis30mVData Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Number of Drivers/Receivers	1/1
Data Rate250kbpsVoltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Duplex	Full
Voltage - Supply3 V ~ 5.5 VOperating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Receiver Hysteresis	30mV
Operating Temperature-40°C ~ 85°CMounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Data Rate	250kbps
Mounting TypeSurface MountPackage / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Voltage - Supply	3 V ~ 5.5 V
Package / Case10-TFSOP, 10-MSOP (0.118", 3.00mm Width)Supplier Device Package10-MSOP	Operating Temperature	-40°C ~ 85°C
Supplier Device Package 10-MSOP	Mounting Type	Surface Mount
	Package / Case	10-TFSOP, 10-MSOP (0.118", 3.00mm Width)
Report errors?	Supplier Device Package	10-MSOP
		Report errors?

ISL32450EIUZ-T7A Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ISL32450EIUZ-T7A Payment Methods



ISL32450EIUZ-T7A Shipping Methods



If you have any question about ISL32450EIUZ-T7A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com