

## **JANTX1N5187**

#### **JANTX1N5187** Information

Heisener.com	Part Number Manufacturer Category Description Package	JANTX1N5187 Microsemi Corporation Discrete Semiconductor Products Diodes - Rectifiers - Single DIODE GEN PURP 200V 3A AXIAL B, Axial For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote



Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **JANTX1N5187 Specifications**

ManufacturerMicrosemi CorporationCategoryDiscrete Semiconductor ProductsDiodes - Rectifiers - SinglePackageB, AxialSeriesMilitary, MIL-PRF-19500/424Diode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If $1.5V @ 9A$ SpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200sCurrent - Reverse Leakage @ Vr $2 \mu A @ 200V$ Capacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction $-65°C \sim 175°C$		
CategoryDiscrete Semiconductor ProductsDiodes - Rectifiers - SinglePackageB, AxialSeriesMilitary, MIL-PRF-19500/424Diode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If1.5V @ 9ASpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr2µA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Manufacturer Part Number	JANTX1N5187
Diodes - Rectifiers - SinglePackageB, AxialSeriesMilitary, MIL-PRF-19500/424Diode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If1.5V @ 9ASpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr2µA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Manufacturer	Microsemi Corporation
PackageB, AxialSeriesMilitary, MIL-PRF-19500/424Diode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If1.5V @ 9ASpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr2µA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Category	Discrete Semiconductor Products
SeriesMilitary, MIL-PRF-19500/424Diode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If $1.5V @ 9A$ SpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr $2\mu A @ 200V$ Current - Reverse Leakage @ Vr $-$ Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction $-65°C ~ 175°C$		Diodes - Rectifiers - Single
Diode TypeStandardDiode TypeStandardVoltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If $1.5V @ 9A$ SpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr $2\mu A @ 200V$ Capacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction $-65°C ~ 175°C$	Package	B, Axial
Voltage - DC Reverse (Vr) (Max)200VCurrent - Average Rectified (Io) $3A$ Voltage - Forward (Vf) (Max) @ If $1.5V @ 9A$ SpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr $2\mu A @ 200V$ Capacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction $-65°C ~ 175°C$	Series	Military, MIL-PRF-19500/424
Current - Average Rectified (Io)3AVoltage - Forward (Vf) (Max) @ If1.5V @ 9ASpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr2µA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Diode Type	Standard
Voltage - Forward (Vf) (Max) @ If $1.5V @ 9A$ SpeedFast Recovery =< $500ns$ , > $200mA$ (Io)Reverse Recovery Time (trr) $200ns$ Current - Reverse Leakage @ Vr $2\muA @ 200V$ Capacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction $-65^\circ$ C ~ $175^\circ$ C	Voltage - DC Reverse (Vr) (Max)	200V
SpeedFast Recovery =< 500ns, > 200mA (Io)Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr $2\mu A$ @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Current - Average Rectified (Io)	3A
Reverse Recovery Time (trr)200nsCurrent - Reverse Leakage @ Vr2μA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Voltage - Forward (Vf) (Max) @ If	1.5V @ 9A
Current - Reverse Leakage @ Vr2µA @ 200VCapacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Speed	Fast Recovery =< 500ns, > 200mA (Io)
Capacitance @ Vr, F-Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Reverse Recovery Time (trr)	200ns
Mounting TypeThrough HolePackage / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Current - Reverse Leakage @ Vr	2μA @ 200V
Package / CaseB, AxialSupplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Capacitance @ Vr, F	-
Supplier Device PackageAxialOperating Temperature - Junction-65°C ~ 175°C	Mounting Type	Through Hole
Operating Temperature - Junction $-65^{\circ}\text{C} \sim 175^{\circ}\text{C}$	Package / Case	B, Axial
	Supplier Device Package	Axial
Report errors?	Operating Temperature - Junction	-65°C ~ 175°C
		Report errors?

#### **JANTX1N5187** Guarantees



Quality Guarantees


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **JANTX1N5187** Payment Methods

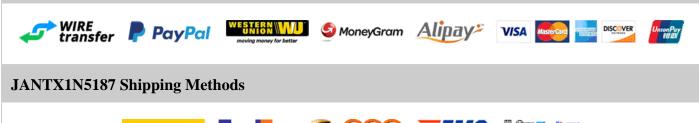



If you have any question about JANTX1N5187, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com