

JCX-30E

JCX-30E Information



Part Number	JCX-30E	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE NON STD	
Package	Cartridge, Non-Standard	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JCX-30E Specifications

ManufacturerEatonCarcuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardPackageCartridge, Non-StandardPackageCartridgePackageCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-PachargeIndicatingApplicationsFaseformer ProtectionPacturesIndicatingApprovals-Operating Temperature-Package / Case50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesJCXStares TypeCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature50kABreaking Capacity @ Rated Voltage50kAMounting TypeFolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Manufacturer Part Number	JCX-30E
Electrical, Specialty FusesPackageCartridge, Non-StandardSeriesJCXFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature50kABreaking Capacity @ Rated Voltage50kAMounting TypeCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Manufacturer	Eaton
PackageCartridge, Non-StandardSeriesJCXSeries Sue TypeCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionSeriesIndicatingClassEApprovals-Operating Temperature-Steaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Category	Circuit Protection
SeriesJCXFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating TemperatureSixABreaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseSixO0" Dia x 10.880" L (76.20mm x 276.35mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating30AVoltage Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-Applicationsransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50KAMounting TypeHolderPackage / CaseCartridge, Non-StandardBreaking Capacity @ Rated StateStateBreaking Capacity @ Rated State50KACartridge, Non-StandardStateBreaking Capacity @ Rated StateStateBreaking Capacity @ StateState	Package	Cartridge, Non-Standard
Current Rating30ACurrent Rating - AC2400V (2.4kV)Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-Standard	Series	JCX
Voltage Rating - AC 2400V (2.4kV) Voltage Rating - DC - Response Time - Applications Transformer Protection Features Indicating Class E Approvals - Operating Temperature - Breaking Capacity @ Rated Voltage 50kA Mounting Type Holder Package / Case Cartridge, Non-Standard Size / Dimension 3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Current Rating	30A
Response Time-ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAPackage / CaseCartridge, Non-StandardPackage / Case3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Voltage Rating - AC	2400V (2.4kV)
ApplicationsTransformer ProtectionFeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAPackage / CaseCartridge, Non-StandardPackage / Case3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Voltage Rating - DC	-
FeaturesIndicatingClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardBize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Response Time	-
ClassEApprovals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardBreaking Chaperature3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Applications	Transformer Protection
Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Features	Indicating
Deperating Temperature-Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardBize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Class	Е
Breaking Capacity @ Rated Voltage50kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Approvals	-
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Operating Temperature	-
Package / CaseCartridge, Non-StandardSize / Dimension3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Breaking Capacity @ Rated Voltage	50kA
Size / Dimension 3.000" Dia x 10.880" L (76.20mm x 276.35mm)	Mounting Type	Holder
	Package / Case	Cartridge, Non-Standard
Report errors?	Size / Dimension	3.000" Dia x 10.880" L (76.20mm x 276.35mm)
		Report errors?

JCX-30E Guarantees

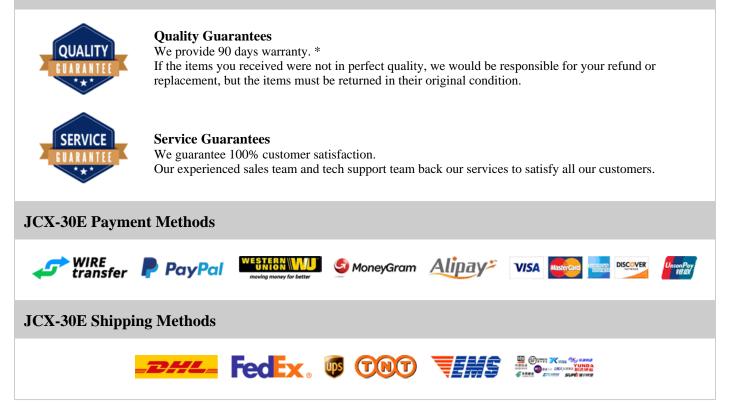

If you have any question about JCX-30E, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com