

# **JJN-200**

#### **JJN-200 Information**



Part Number	JJN-200	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 200A 300VAC/160VDC	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### **JJN-200 Specifications**

ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)StriesLimitron? JJNFuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DCFastApplicationsElectrical, IndustrialFuser SymeCartridgeApprovalsCEC SCA, ULOperating Temperature-Breaking Capacity @ Rated VoltageOtok AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)			
CategoryCircuit ProtectionCategoryCircuit ProtectionBectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200k A C, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Manufacturer Part Number	JJN-200	
Bit ControlElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Manufacturer	Eaton	
PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Type-Breaking Capacity @ Rated Voltage200k AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Category	Circuit Protection	
SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)		Electrical, Specialty Fuses	
Fuse TypeCartridgeCurrent Rating200AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Package	Cylindrical, Blade Terminal (Bolt)	
Current Rating200ACurrent Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Series	Limitron? JJN	
Voltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Fuse Type	Cartridge	
Voltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Current Rating	200A	
Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Voltage Rating - AC	300V	
ApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Voltage Rating - DC	160V	
Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Response Time	Fast	
ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Applications	Electrical, Industrial	
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Features	-	
Operating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Class	Т	
Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Approvals	CE, CSA, UL	
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Operating Temperature	-	
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.880" W (21.33mm x 22.35mm)	Breaking Capacity @ Rated Voltage	200kA AC, 20kA DC	
Size / Dimension 0.840" L x 0.880" W (21.33mm x 22.35mm)	Mounting Type	Bolt Mount	
	Package / Case	Cylindrical, Blade Terminal (Bolt)	
Report errors?	Size / Dimension	0.840" L x 0.880" W (21.33mm x 22.35mm)	
			Report errors?

#### **JJN-200 Guarantees**

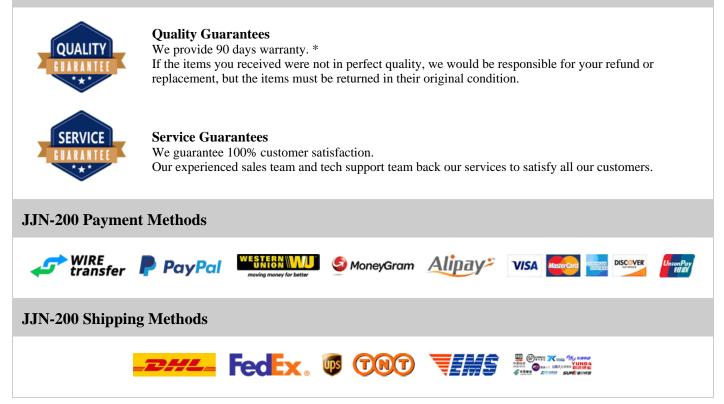

If you have any question about JJN-200, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com