

JJN-25L

JJN-25L Information



Part Number	JJN-25L	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 25A 300VAC/160VDC	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JJN-25L Specifications

ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCatridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFusters-ClassTApprovalsCEX, ULOperating Temperature-Breaking Capacity @ Rated Voltage200k AC, 20k ADCMounting TypeBolt MountPackage / CaseSci Mount		
CategoryCircuit ProtectionCategoryCircuit ProtectionPackageCylindrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCattridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Manufacturer Part Number	JJN-25L
Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCBreaking Capacity @ Rated VoltageCylindrical, Blade Terminal (Bolt)Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Category	Circuit Protection
SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating25AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Series	Limitron? JJN
Voltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / Case0.875" L x 0.500" W (22.23mm x 12.70mm)	Fuse Type	Cartridge
Voltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Current Rating	25A
Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Voltage Rating - AC	300V
ApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Voltage Rating - DC	160V
Features-Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Response Time	Fast
ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Class	Т
Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Approvals	CE, CSA, UL
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.875" L x 0.500" W (22.23mm x 12.70mm)	Breaking Capacity @ Rated Voltage	200kA AC, 20kA DC
Size / Dimension 0.875" L x 0.500" W (22.23mm x 12.70mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	0.875" L x 0.500" W (22.23mm x 12.70mm)
		Report errors?

JJN-25L Guarantees

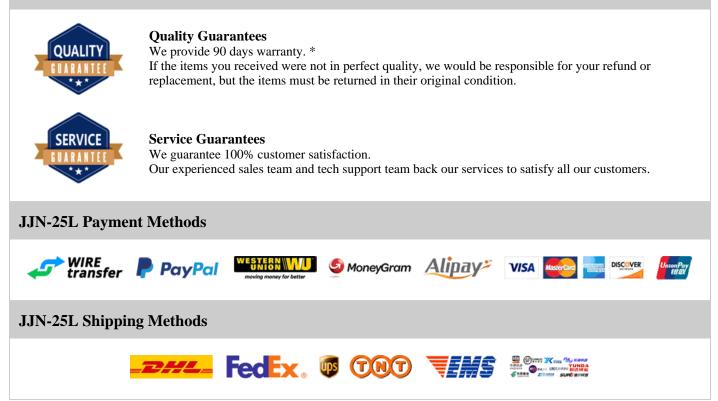

If you have any question about JJN-25L, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com