

JJN-90

JJN-90 Information



Part Number	JJN-90	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 90A 300VAC/160VDC	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JJN-90 Specifications

ManufacturerEatonCategoryCircuit Protection Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)PackageCylindrical, Blade Terminal (Bolt)StriesLimitron? JJNFuse TypeCartridgeCurrent Rating90AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCBreaking Capacity @ Rated VoltageBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)		
CategoryCircuit ProtectionBeckageElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating90AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Manufacturer Part Number	JJN-90
Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating90AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kA AC, 20kA DCBreaking Capacity @ Rated VoltageBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating90AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Category	Circuit Protection
SeriesLimitron? JJNFuse TypeCartridgeCurrent Rating90AVoltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / Case0.840" L x 0.750" W (21.33mm x 19.05mm)		Electrical, Specialty Fuses
Fuse Type Cartridge Fuse Type Cartridge Current Rating 90A Voltage Rating - AC 300V Voltage Rating - DC 160V Response Time Fast Applications Electrical, Industrial Features - Class T Approvals CE, CSA, UL Operating Temperature - Breaking Capacity @ Rated Voltage 200kA AC, 20kA DC Mounting Type Bolt Mount Package / Case Cylindrical, Blade Terminal (Bolt) Size / Dimension 0.840° L x 0.750° W (21.33mm x 19.05mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating90ACurrent Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Series	Limitron? JJN
Voltage Rating - AC300VVoltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseC.ylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Fuse Type	Cartridge
Voltage Rating - DC160VResponse TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Current Rating	90A
Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Voltage Rating - AC	300V
ApplicationsElectrical, IndustrialApplications-Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Voltage Rating - DC	160V
Features-Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Response Time	Fast
ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Class	Т
Breaking Capacity @ Rated Voltage200kA AC, 20kA DCMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Approvals	CE, CSA, UL
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.840" L x 0.750" W (21.33mm x 19.05mm)	Breaking Capacity @ Rated Voltage	200kA AC, 20kA DC
Size / Dimension 0.840" L x 0.750" W (21.33mm x 19.05mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	0.840" L x 0.750" W (21.33mm x 19.05mm)
		Report errors?

JJN-90 Guarantees

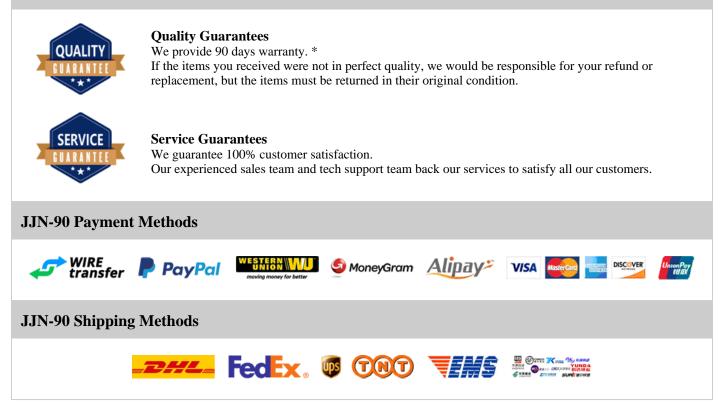

If you have any question about JJN-90, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com