

JJS-60 Information



Part Number	JJS-60	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 60A 600VAC NON STD	
Package	Cartridge, Non-Standard	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JJS-60 Specifications

Manufacturer Part Number JJS-60 Manufacturer Eaton Category Circuit Protection Package Electrical, Specialty Fuses Package Cartridge, Non-Standard Series Limitron? JJS Fuse Type Cartridge Current Rating 60A Voltage Rating - AC 600V Voltage Rating - DC - Response Time Fast Applications Electrical, Industrial Features - Class T Operating Temperature - Prackage (Case CotokA Mounting Type Holder Package / Case Cartridge, Non-Standard		
CarterCircui ProtectionCartidge, Non-StandardPackageCartridge, Non-StandardSeriesLimitron? JJSFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dix s 1.560" W (20.57mm x 39.62mm)	Manufacturer Part Number	JJS-60
ConstraintElectrical, Specialty FusesPackageCartridge, Non-StandardSeriesLimitron? JJSFuse TypeCartridgeFuse Type60ACurrent Rating60OVVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Manufacturer	Eaton
PackageCartridge, Non-StandardSeriesLimitron? JJSFuse TypeCartridgeFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / Case0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Category	Circuit Protection
SeriesLimitron? JJSFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kABreaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)		Electrical, Specialty Fuses
FindEnderseFuse TypeCartridgeCurrent Rating60AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kABreaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Package	Cartridge, Non-Standard
Current Rating60ACurrent Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Series	Limitron? JJS
Voltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Current Rating	60A
Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Voltage Rating - DC	-
Features-Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Response Time	Fast
ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Class	Т
Breaking Capacity @ Rated Voltage200kAMounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Approvals	CE, CSA, UL
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Operating Temperature	-
Package / CaseCartridge, Non-StandardSize / Dimension0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Breaking Capacity @ Rated Voltage	200kA
Size / Dimension 0.810" Dia x 1.560" W (20.57mm x 39.62mm)	Mounting Type	Holder
	Package / Case	Cartridge, Non-Standard
Report errors?	Size / Dimension	0.810" Dia x 1.560" W (20.57mm x 39.62mm)
		Report errors?

JJS-60 Guarantees

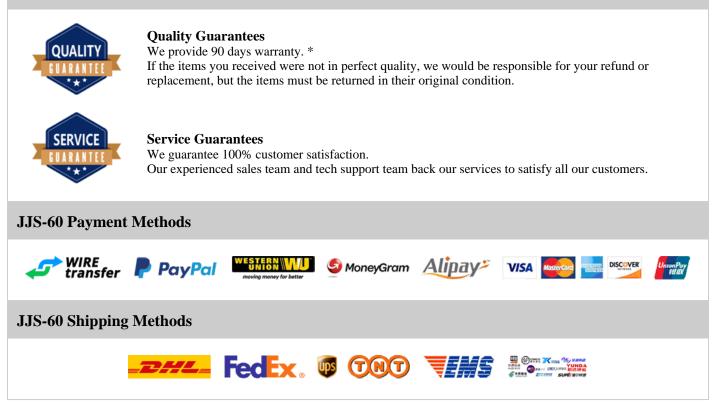

If you have any question about JJS-60, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com