

JJS-70 Information



For Reference Only

Part Number	JJS-70	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 70A 600VAC CYLINDR	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



JJS-70 Specifications

Manufacturer Part NumberJJS-70ManufacturerEatonCategoryCircuit ProtectionBectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFusaryCartridgeOperating Temperature-Operating Temperature-Operating Temperature200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / DimensionLindrow W(42.16mm x22.35mm)		
CategoryCircuit Protection Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)PackageLimitron? JJSFuse TypeCatrtidgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kAMounting TypeBolt MountPackage / CaseSci MountSize / DimensionSci Sta SW, W(42.16mm x 22.35mm)	Manufacturer Part Number	JJS-70
Electrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kABreaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Bolt)SeriesLimitron? JJSFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTOperating Temperature-Operating Temperature200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Category	Circuit Protection
SeriesLimitron? JJSFuse TypeCartridgeCurren Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kABreaking Capacity @ Rated VoltageBiot Mounting TypePackage / CaseCiglindical Elemental (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse TypeCartridgeCurrent Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature200kABreaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating70AVoltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Series	Limitron? JJS
Voltage Rating - AC600VVoltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated VoltageBolt MountMounting TypeBolt MountPackage / CaseClyindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Current Rating	70A
Response TimeFastApplicationsElectrical, IndustrialFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Voltage Rating - AC	600V
ApplicationsElectrical, IndustrialApplications-Features-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Voltage Rating - DC	-
InFeatures-ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Response Time	Fast
ClassTApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Applications	Electrical, Industrial
ApprovalsCE, CSA, ULOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Features	-
AOperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Class	Т
Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Approvals	CE, CSA, UL
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension1.660" L x 0.880" W (42.16mm x 22.35mm)	Breaking Capacity @ Rated Voltage	200kA
Size / Dimension 1.660" L x 0.880" W (42.16mm x 22.35mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	1.660" L x 0.880" W (42.16mm x 22.35mm)
		Report errors?

JJS-70 Guarantees

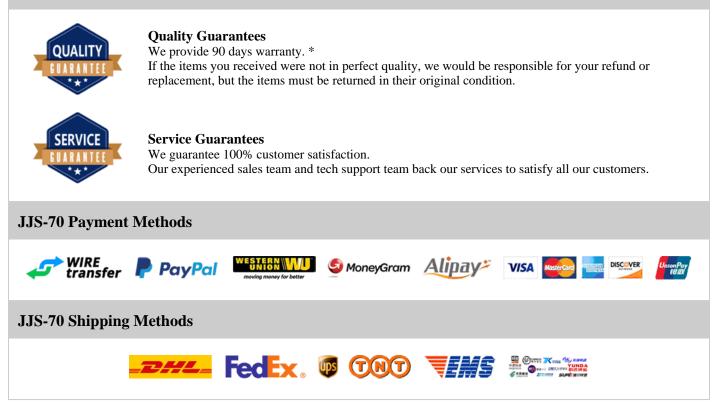

If you have any question about JJS-70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com